


Please type a plus sign (+) inside this box → ☒


PTO/SB/05 (4/98)

Approved for use through 09/30/2000. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Patent and Trademark Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

 06/12/00 1545	UTILITY PATENT APPLICATION TRANSMITTAL	Attorney Docket No. 100830-10100
		First Inventor or Application Identifier WILLIAM M. BROWN et al.
		Title METHOD AND APPARATUS FOR WIRELESS NETWORKING
		Express Mail Label No. EM88936920US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.		ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231		
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)	 1545 U.S. PTO 09/594581 06/12/00		
2. <input checked="" type="checkbox"/> Specification [Total Pages <input]<br="" type="text" value="36"/> (preferred arrangement set forth below) - Descriptive title of the invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the invention - Brief Summary of the invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure	6. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies			
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets <input]<="" td="" type="text" value="36"/> <td colspan="2">ACCOMPANYING APPLICATION PARTS</td>	ACCOMPANYING APPLICATION PARTS			
4. Oath or Declaration [Total Pages <input]<br="" type="text" value="3"/> a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))			
	8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)			
	9. <input type="checkbox"/> English Translation Document (if applicable)			
	10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations <input]<="" td="" type="text" value="36"/>			
	11. <input type="checkbox"/> Preliminary Amendment			
	12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)			
	13. <input checked="" type="checkbox"/> * Small Entity Statement(s) [Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)]			
	14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)			
	15. <input type="checkbox"/> Other: _____			

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

<input type="checkbox"/> Continuation	<input type="checkbox"/> Divisional	<input type="checkbox"/> Continuation-in-part (CIP)	of prior application No: _____
Prior application information: Examiner _____		Group / Art Unit: _____	

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS					
<input type="checkbox"/> Customer Number or Bar Code Label [Insert Customer No. or Attach bar code label here] or <input checked="" type="checkbox"/> Correspondence address below					
Name	Bernard L. Kleinke, Esq. Higgs, Fletcher & Mack, LLP				
Address	401 West "A" Street, Suite 2600				
City	San Diego	State	CA	Zip Code	92101
Country	U.S.A.	Telephone	(619) 236-1551	Fax	(619) 696-1410

Name (Print/Type)	Bernard L. Kleinke, Esq.	Registration No. (Attorney/Agent)	22,123
Signature		Date	June 12, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)
100830-10100

Applicant, Patentee, or Identifier: WILLIAM BROWN et al.

Application or Patent No.: TBA

Filed or Issued: TBA

Title: METHOD AND APPARATUS FOR WIRELESS NETWORKING

I hereby state that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN METRIC SYSTEMS CORPORATION

ADDRESS OF SMALL BUSINESS CONCERN 6150 Yarrow Drive, Suite E
Carlsbad, CA 92009

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

- Each person, concern, or organization having any rights in the invention is listed below:
☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING William M. Brown

TITLE OF PERSON IF OTHER THAN OWNER President

ADDRESS OF PERSON SIGNING 2052 Sequoia Street, San Marcos, CA 92069

SIGNATURE *William M. Brown, President* DATE 6 June 2000

TITLE OF THE INVENTION

METHOD AND APPARATUS FOR WIRELESS NETWORKING

CROSS-REFERENCE TO RELATED APPLICATIONS

Not Applicable

5 STATEMENT REGARDING FEDERALLY SPONSORED
RESEARCH OR DEVELOPMENT

Not Applicable

REFERENCE TO A "MICROFICHE APPENDIX"

Not Applicable

10 BACKGROUND OF THE INVENTION

Technical Field

15 The present invention relates in general to a method and apparatus for wireless networking. The invention more particular relates to wireless networking router system for facilitating communications via wireless transmission, in a more efficient and reliable manner.

Background Art

20 In industrial automation it becomes necessary to gather information from several remote sites and use that information to control operations at the remote sites. The data is gathered by using various types of transducers that measure the physical variables (such as temperature, revolutions per minute, etc.) and convert them into electrical signals. Similarly the remote equipment can be controlled by using mechanisms that

convert electrical signals into physical motion such as turning a valve or operating a switch. A Remote Terminal Unit (RTU) is the interface between these electrical signals and a communications medium. Remote Terminal Units are also known as Logic Controllers and Programmable Logic Controllers (PLC).

5 An RTU will convert the electrical signals into digital representations and send them on a digital communications channel. They will also receive digital data from the communications channel and convert it into electrical signals for control of the equipment at the site. Various communications protocols have been invented to carry the data on various types of communications channels. The most typical
10 communications channel is a multidrop asynchronous serial channel with a "master" station that controls access to the channel and several "slave" stations that communicate, one at a time, with the master station. An RTU would be one of the slave stations and a central data processor would be the master. Several communications protocols, such as MODBUS, have been invented to handle this architecture. This type of protocol
15 typically has the data gathering program at the master computer site request data from one slave station at a time and send data to one slave at a time. The control program has complete control over the activity on the communication channel.

Occasionally the situation exists where it is difficult to place all of the RTUs on a wire channel. This most often happens when the distances between the RTUs are too
20 great for wire connections. It also happens when there are physical or economic or legal

barriers to making the wire connections. In these cases a wireless connection is needed.

Since the operational characteristics of radios are very different from those of wires, the use of radio has exposed serious weaknesses in the master/slave model of

communications. The master/slave communications model assumes that there is a

5 master that can control a single channel that is also available to all of the slaves.

It is frequently impossible or at least very difficult, to get a radio signal from a central master site to all of the slave sites. Even when there is a place where a master station could be put so that it can communicate with all of the slave stations, this place is frequently not a good place to locate the data gathering program (such as a mountain

10 top.) The normal solution to these problems involves a series of repeater stations, all still under the control of the data gathering program. In essence extra radio channels have been added, but are being used as if they were a part of a single channel. This means that when one of the channels is operational other channels must be still, even when the separate channels do not conflict in any physical way with each other.

15 Internet Protocol has attempted to solve this problem by removing the control of the networks and links from the application (such as the data gathering program.) The application program sends data to the address of the destination and is not concerned with the processing and communication necessary to actually move the data. All of the channels can be used to their capacity without impacting the application program.

Recently some RTUs have begun to use the Internet Protocol (IP) using ethernet communications. Using IP protocol allows having a router on the same ethernet. An IP router, such as the one marketed under the tradename "MAVRIC" by Metric Systems Corp., of Carlsbad, California, can allow access to wireless transmission of the data across a network of arbitrary topology, by interconnecting ethernet or other inputs to the flexibility of the topology offered by IP routing allows placement of radios wherever they are needed for connectivity. The combination of an RTU using IP on an ethernet channel and an IP router on the same ethernet channel solves all the topological problems of using wireless communications for data acquisition and control.

While such a system has proven highly successful, it would be desirable to have a more band width utilization efficient system to operate at a variety of different bands.

SUMMARY OF THE INVENTION

The principal object of the present invention is to provide a new and improved method and apparatus for facilitating wireless networking.

Another object of the present invention is to provide such a new and improved method and apparatus which are more band width utilization efficient.

Briefly, the above and further objects of the invention are realized by providing an improved technique for greatly improving the band width utilization efficiency.

A method and apparatus for wireless networking employs a wireless protocol module and a wireless device interface module for controlling a remote terminal unit,

whereby the modules integrate the remote terminal unit software and wireless networking application software.

BRIEF DESCRIPTION OF DRAWINGS

The above mentioned and other objects and features of this invention and the manner of attaining them will become apparent, and the invention itself will be best understood by reference to the following description of the embodiment of the invention in conjunction with the accompanying drawings, wherein:

FIG. 1 - , illustrate the method and apparatus of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

Referring now to the drawings, and more particularly to FIG.1 thereof, there is shown a wireless internetworking Embedded RTU/PLC system 10, which is constructed in accordance with the present invention. The system 10 sensor device input modules 12 which respond to a variety of inputs such as a analog or digital input 14, an asynchronous input 16 as well as other possible inputs.

The system also includes a device Protocol conversion Module which converts the instrumentation time discrete information in an IP* GAS1d Protocol that can be Routed and Service by the embedded Router

The system 10 also includes a level 3 router module 18, which internally routes data packets. A protocol conversion module 21 converts the time discrete information into an Internet Protocol (IP) base protocol. A wireless protocol module 23 creates reliable links to multiple users within the radio range of each transceiver. A wireless

device interface module 25 provides interface requirements for a given radio transceiver generally indicated at 27.

The following is a table explaining the function of the system modules:

5	Basic System Operation: Module RTU/PLC Input device	Function Converts Physical and virtual parameters datagrams that are bi-directional transferred to the protocol conversion module.
10	Protocol Conversion module	Converts the Instrumentation time discrete information into an IP base protocol that can be routed and serviced by the embedded IP router.
15	Level 3 Internet protocol Router	Internally routes the instrumentation data packets to the appropriate wireless cell also maintains internal network map of all connecting links.
20	Wireless protocol Module	This module manages five functions required to create reliable links to multiple users within the radio range of each attached transceiver:
25	Wireless Device Interface Module	Provides the specific physical interface requirements to support various types of wireless radios and physical interfaces; i.e. RS-232/Ethernet/RS-530/ etc.
30		

When the system 10 is shown and described as being preferably useful in connection with control and monitor functions in an industrial automation process, the system of the present invention can also be used for a variety of different applications,

including, but no limited to, telephony, permanent virtual circuits, lease lines, frame delays and others.

Each of the asynchronous ports can be user configurable as

- A wireless network gateway supporting a point-to-point or multi-point portal.
- 5 ▪ An Asynchronous IP gateway e.g. a SLIP port
- Or as an dedicated point-to-point permanent virtual circuit – much like a dedicated circuit.

10

- The basic **system** Five (5) communication ports provisioned as four asynchronous **Comm** ports and one 10base T Ethernet port.
 Y Comm 1/ J1 is a RS-232/RS-485 port
 Y Comm2/J2 is a RS-232 port
 Y Comm3/J3 is a RS-232 port
 Y Comm4/J4 is a RS-232 port
 Y J5 is a 10Base T Ethernet port
 J6 is the Input Power connector.

15 **Mavnet Section of the initialization string**

The Mavnet Section file gives the system its overall “personality”. The lines in the file may appear in any order. All characters in the file are converted to upper case before being examined. The items, which may appear in this Section, are:

“NAME=” The value of this parameter is a string of characters with no embedded blanks. Each system in a network may be named. The name is displayed on the video display and is returned with the status when a “**MavWatch**” remote status request is made. The name has no effect on the operation of the system.

5 Example:

NAME=Vista_Point

“ROUTE DISCOVERY=” The value of this parameter is “ON” or “OFF” (default “OFF”.) systems can exchange routing information using the Internet Protocol RIP2. RIP2 causes each node in the network to forward its routing table to all neighboring
10 nodes (that are within the same Autonomous System.) As the routing information is propagated, each node eventually becomes aware of the routes to all of the nodes in the network. Normally this function should be enabled. However, when it is desired to save radio bandwidth by having all routes entered into a static table, the route discovery function can be turned off.

15 Example:

ROUTEDISCOVERY=ON

“DISCOVERY INTERVAL=” The system periodically sends RIP2 updates to its neighbors in accordance with the IP RIP2 specification. The interval of that period can be set with this parameter. The value of the parameter is the interval in minutes (default
20 5.)

Example:

DISCOVERY INTERVAL=1

“ROUTER=” The value of this parameter is the IP addresses of an external router entered as either dotted decimal (e.g., 192.0.1.13) or as a hexadecimal number (e.g.,

- 5 C000010D). If this parameter is specified, all unroutable packets will be sent to this address. Of course there must be a route to this address. In most cases it will be discovered by RIP2; however, some systems must have it specified as a static route.

Example:

ROUTER=192.0.1.13

- 10 “BOOTP=” The value of this parameter is the IP address of a BOOTP server entered as either dotted decimal (e.g., 192.0.1.13) or as a hexadecimal number (e.g., C000010D). The system can act as a BOOTP relay agent so that hosts on the Intranet can download their operational values (including their IP address) from a BOOTP (or related) server.

Example:

- 15 BOOTP=192.0.2.125

3.2 Devices Section of the Initialization String

Each line in the devices section file defines an IP address and link type. The format of each line is:

Link Name, Link IP Address; or

- 20 *Link Name, Link IP Address, X;*

The final parameter “X”, indicates that this is an external link out of the Autonomous System of systems. No routing information is automatically exchanged across this link. In the absence of the final parameter, the link is internal and routing information is exchanged, if route discovery is turned on (see mavnet.ini.)

- 5 The Link IP Address is the IP address of this end of the link (other ends of the same link have different IP addresses) entered as either dotted decimal (e.g., 192.0.1.13) or as a hexadecimal number (e.g., C000010D).

The Link Name can have one of the following formats:

- 10 “PFx”, The link uses the “Pathfinder” point to multi-point link level protocol (half duplex links also use this protocol.) The x character denotes the multi-point cell for this link; it may be any character. Normally, the cells are labeled “PFA”, PFB”, “PFC” etc. Having a “PFx” link demands that a PFX Section file also be present in the same initialization string.

- 15 “SLPn”, The link uses the IP SLIP framing on a full duplex connection on COM port n. A “comm n Section file will be examined, for additional parameters associated with the COM port. A slip n Section file will be examined for additional parameters for the SLIP port. The number of SLIP ports per system node is controlled by the number of asynchronous RS-232 ports and corresponding free interrupts.

SYSTEM IP ROUTING

- 20 Each system 10 uses static or dynamic routing tables to decide where to send a

packet. The routing table is a list of all the network segments that IP knows how to reach. If the network is operating in the Automatic Route Discovery Mode, the routes are being verified and updated as often as required, otherwise the system uses fixed (static) routes. External links must have the routes defined in the ROUTES.INI file.

5 A static route is a route that never changes and that you must enter when manually configuring your IP addresses and system Network. Static routes persist across power-downs, restarts, and software reloads. They are used when the router for some reason cannot determine the correct route dynamically, or to provide a link to an external address. IP routing happens as follows:

- 10 1. The system IP router receives the packet and reads the 32-bit destination address found within the packet header.
2. If the packet is destined for this router, further routing is not necessary and the IP hands the packet to the appropriate internal software module. Packets in this
- 15 category include the following:
- Control packets for IP itself
 - Routing update packets
 - Packets used for diagnostic purposes
3. If the packet is destined for a host on a directly-connected network segment,
- 20 IP matches the 32-bit destination address with the appropriate physical address table. IP

then hands the packet to the appropriate lower-level protocol module for transmission directly to the destination node.

4. If the packet is destined for a host on a remote network segment, IP uses the routing table to determine which router leads to that network segment. Each entry in the routing table contains a destination address and the IP address of the next hop router. If IP matches the destination address in the table with the destination contained in the packet the packet is handed to the appropriate lower-level protocol module for transmission to that next hop.

5. If the packet has no entry for its IP address in the routing table, the packet is routed to the default router. Default routers are used to route the packets whose destination address is not found in the routing table. This router is assumed to know the location of the packets destination.

Static Route Configuration

Referring now to FIG. 2, there is shown a static route configuration where the system 10 is responding to a network device 30, and in turn wirelessly communicates with like system units 31, 32 and 33. The system units 31, 32 and 33 are each similar to the system 10.

Static Routes Example

Each line in the routes section of the initialization string file has the following format:

Destination IP Address, IP Subnet Mask, Local Link (gateway) IP Address;

Example: 192.12.13.45, FFFFFFFF, 192.34.24.100;

or

Destination IP Address, IP Subnet Mask, Local Link (gateway) IP Address, Next Hop IP

5 *Address;*

Example: 192.12.13.45, FFFFFFFF, 192.34.24.100, 201.22.90.10;

The Destination IP Address gives the address of the final destination as contained in an IP packet, or a subnet address for the final destination. The IP Subnet Mask gives the subnet mask for the destination of the packet. The Local Link (gateway) IP address is one of the IP addresses contained in the "devices.ini" file. The binary intersection ("and") of the destination address of a packet and the subnet mask is compared to the Destination IP Address. If the two are equal, the packet is routed out of the local link specified by the Local Link (gateway) IP Address. A subnet mask is composed of leading (most significant bits) ones followed by trailing zeroes. The same destination may be covered by several different subnet masks. The packet is routed out the link corresponding to the most specific (most one bits) subnet mask. The Next Hop IP Address is used when route discovery is turned off. It allows the pathfinder point to multi-point protocol to associate a pathfinder link address with the destination IP address by finding the link address of the next hop.

Slipn Section of the initialization string

Each line of the Section defines a parameter of the SLIP link. The parameters are defined as follows

5 “MTU= mtu” “mtu” is a decimal number giving the Maximum Transmission Unit on the SLIP link. The default is 584 bytes.

“TTO=ttp” “ttp” is a decimal number giving the transmission timeout interval in milliseconds. The default is 500.

10 “KEEP_ALIVE_SIZE=keepAliveSize” “keepAliveSize “ is a decimal number that sets the size of the keep alive link level data packets that are interchanged on internal SLIP links. The default is set by the link protocol. Specifying a value less than the default results in the default being used. This parameter is useful for those radios that do not immediately transmit data but store it up until a specific buffer size is filled. By setting the keep alive size parameter, the link level packet can be forced out immediately.

Commn Section of the initialization string

15 This Section sets the parameters for serial port “n”. Each line sets a single parameter. The parameters are as follows:

“BAUD= baud” “baud” is the number of bits per second transmitted and received by the serial port. It is a decimal number. Any number entered will be converted to the nearest baud divisor. The baud divisor is divided into 115200 to form the actual bits per

second used by the serial port. The MAVRIC baud rate should be set to equal the DTEs baud rate.

“PARITY= parity” “parity” may have the values “NONE”, “ODD”, “EVEN”, “MARK”, and “SPACE”. The default is “NONE”. Please note this parameter is set as
5 the same as the DTE’s .

“DATA BITS= dataBits” “dataBits” is a decimal number no less than 5 nor larger than 8. The default is 8, entries outside the permitted range result in the default being used.

“STOP BITS= stopBits” “stopBits” is either “1” or “2”. Numbers larger than 1 result in two stop bits; numbers smaller result in one stop bit. The default is one stop bit.

10 “XON= xon” “xon” is either “0” or “1”. The value “1” turns on XON/XOFF flow control. The default is “0”;

Configuration Examples:

Example 1.

Set COMM1 port to 38.4 kbps and set for software (XON/XOFF) flow control.

15 Section name: COMM1

BAUD= 38400

XON=1

NetWatch

NetWatchTM is a network tool designed to test system Wireless Networks. It
20 allows the user to probe network connectivity from any **External** SLIP port (usually

Port 1). It displays packet statistics such as Round Trip Time, Success Rate, Packets Send/Received, and Probe Intervals.

When NetWatch is started, the screen shown in FIG.6 is presented.

At this point user may want to create their own test files, or open a stored test file. Included on the floppy disk labeled as NetWatch is a test file **PROJECT_NAME.NET** designed by Metric Systems Corporation for the user.

Creating a Test File

If you wish to create a new NET file, click on the Define button or choose Define under Tools menu. The pop-up **Node Definition Action** window presents user three choices: New, Modify, and Done. **NEW** allows user to create a new Node in the network. The screen shown in FIG. 7 appears.

Enter the name of the node and a brief description in the appropriate boxes. Each node may have several devices with different IP Addresses attached to it. Use the **New Link** button to add as many devices as necessary. The menu shown in FIG. 8 will pop-up.

Choose a link type and enter the address in the appropriate boxes. As shown in the example above, the link is defined as SLIP with an IP Address 192.29.2.2. Check all information carefully and click **OK** to save the link. Continue adding links until all links on the node are entered, then click **OK** button in the Define New Node window. This brings you back to the Node Definition Action window. Choose **DONE** if all of

the nodes are defined or **NEW** to continue adding new nodes.

The final step in setting-up NetWatch for your network, is to select the recorded links you want to test. In the NetWatch window, click on Check Integrity Probe button or choose Integrity Probe under Tools menu. The Integrity Probe Control window
5 pops-up (FIG. 9).

Click on the **Add** button and choose which links you want to test. If all the links require testing, choose **Select All Addresses** and click **Done** button. Now go back to the NetWatch window and save this test file under appropriate name.

Open Stored Test File

10 To open a saved .NET file, choose **Open** under File menu, or click on the **Open File** icon. If the file is loaded properly, a new name should be in the top box of the NetWatch window.

Using NetWatch

Once the test file is loaded, go to the integrity probe window (click on). Before
15 starting the test, set the probe interval. This determines how often probe packets are sent. Probe Interval Settings are in milliseconds, e.g.: 1000 ms equals to 1 sec. To start the test press **Start** button in the Integrity Probe window. NetWatch starts to send packets to different stations and log returned packets.

Information can be obtained from the window shown in FIG. 10.

20 Name, address, and description of station the probe has just sent to (Station 3,

192.3.2.1, CNX3), statistics about round trip time (110 ms), number of packets sent and received (4/4).

To find more details, press **Find** button, which leads the user in the window of FIG. 11.

5 Here the user can monitor status of all stations.

To go back to the Integrity Probe window, click on the **Done** button. To see more details on one of the stations, highlight the station you want to explore and click on the **Details** button. The window of FIG. 12 will pop-up.

10 This is the same information as can be seen on the Integrity Probe window, except the information doesn't change every time a new probe is send out. To go back to the previous window, click the **OK** button.

GLOSSARY

The terms listed below will be found in error-messages and system operations description descriptions.

15 **Ack:** The transmission character used to indicate positive acknowledgment of a transmitted datagram message packet.

Automatic Route Discovery: An option that enables MAVNET to discover all available routes throughout the network automatically, instead of using static routes table.

Autonomous System: A network which is governed by automatic route discovery.
20 An Autonomous System has all internal links and all routes use the same subnet mask.

Client Terminal: Any digital data source or receiver such as computers, SCADA, dumb terminals, Automatic Teller Machines, Credit card terminals, etc.

Client Protocol: A set of specifications including formats, timing, and rules that govern the functional operations of a digital data device in order to guarantee the accurate and reliable transmission of data between the client terminal and the system station.

External SLIP: a link that is outside an autonomous system, such as a network console.

Hub Station: A system configured to support system Multi-Point topologies.

Internal SLIP: a link that is within an autonomous network.

SYSTEM: A family Networking Equipment & Software solutions for building wide-area, multi-point, multi-access wireless data networks.

Naks: A transmission PDU sent to the sender, indicating that the decoded message packet has errors).

Primary Station: The system Station responsible for interrogating each secondary for outbound.

Null Modem Connection: A connecting cable used for direct serial communication between two stations.

PATHFINDER 9600: A synthesized UHF integrated 9600 baud transceiver used for wireless transmission of data. The **PATHFINDER 9600** supports the frequency range of 385 to 512 MHz in six bands.

Pathwork: A set of software applications used as an aid in designing and evaluating the performance of a system circuits

Relay Station: A system Station which receives, re-addresses and re-transmits the packets, to another system secondary or primary station, thus extending coverage.

5

Secondary Station: A system Remote Station working under the control of the primary.

Secondary Access Node: Same as system Secondary Station.

System Multi-Point Cell: Network in which each secondary station is linked to a primary station, via a rotating electronic token, which interrogates and notifies each station for data.

10

4.8.6 Summary

NetWatch can be used to test entire or portions of the network for any period of time. The user can turn on an audio annunciator in the Integrity Probe window () and minimize the window. Every time a packet fails to return within the preset time window, a ping will be heard. If a series of pings occurs, the user should restore the Integrity Probe window and go to the detail display screen to examine the connectivity to each remote node.

15

Overview of Router Functions

20

An Internet Protocol (IP) router is considered to contain three distinct sets of operations. The first set

is the physical interface to the communications hardware. The host computer itself may be thought of as a physical interface; it communicates with the application processes.

The second set is the link handlers that prepare the

5 Internet packet for transmission over the physical interfaces and receive the packet over the physical interfaces. The link handlers must also handle the configuration of the physical interface and any negotiations between the various other link handlers that

10 share a physical interface. The set of operations that send and receive packets from applications executing on the host computer may be considered a link handler also; it is the host link. The third set is the routing functions that decide which of the link handlers to use for a particular

15 packet based upon its destination address. One of the link handlers available to the routing operations is the host link. All IP packet arrive at the routing functions through one of the links and most packets depart the routing functions through one of the links; it can happen

20 that an arriving packet is not re-routed but simply discarded

Description of the Routing Functions

The routing functions receive packets from the links

25 and send the packets to other links. The routing functions

obey the IP subnetting rules. The host machine is considered a link with its own set of addresses both of its native link addresses and of its multicast addresses.

Description of the Link Handlers

5 A link handler moves data from the current station to one or more stations that may share the link. Links have several queues for holding data. The queues are prioritized by the IP packet Type Of Service (TOS) field. By maintaining separate data structures for different TOS
10 groups, the link is able to send packets with a Minimize Delay TOS before other packets.

Host Link

 The host link is responsible for sending data two and from the applications on the host processor. The normal
15 model for such host communications is a ~~socket~~. The host link is also responsible for the Internet Control Message Protocol processing.

Serial Radio Links - Point to Multipoint

 A point to multipoint link is a link in which several
20 stations communicate over a single channel. In order to control access to this channel, one station is designated as the primary (master) and the other stations are designated as secondary (slaves.) The systems point to multipoint link comprises several parallel channels.

25 Parallel channels must all have the same set of stations.

Point to Multipoint processing is accomplished by several cooperating event driven finite state automata (each referred to as a process.) A description of each of these processes follows. The following description refers to

5 the Link Process

The link process is responsible for starting up a transmit process for each channel. Operationally the link process receives packets from the routing functions and distributes them among the operational channels. The link
10 process does not control access to the various channels. That function is controlled by each channel independently. Creation and Initialization

The creation function initializes the link parameters and creates a Radio Transmit Process for each channel. The
15 initialization function initializes each of the Radio Transmit Processes, it then adds the link and its IP address to the routing data base and schedules the Outgoing Packet Handler for dispatching.

Outgoing Packet Handler

20 The outgoing packet handling state distributes the packets to one of the working channels. There is little for the state to do on a secondary station except to insure that the input queue does not overflow and to check the state of all the channels, if all of them should quit
25 working then route discovery is started (where available)

to find replacement routes. The Radio transmit process for the secondary may simply dequeue a packet from the link queue when it has been selected for transmission.

For a primary station, on the other hand, the processing is more involved since a transmission channel must be selected. In such a way that the channels are well used. Since channels may not operate at the same speed, it is not suitable to use each channel equally. Instead, the outgoing packet handler tries to maintain the queues to the various working radio transmission processes at equal length. If there are no working channels then route discovery is started (where available) to find replacement routes.

Radio Transmit Process

The Radio Transmit process controls transmission of frames on a single channel. This process comprises a multitude of states. The states are divided into two parts one for a primary station and the other for a secondary station. A primary station state never schedules a secondary station state and vice versa.

There are two kinds of frames, a link frame and an IP frame. Both kinds of frame use SLIP framing and the first character of the frame is used to discriminate between IP and link frames. The link frames are really channel frames

since the data they pass between the primary and secondary are used to control the channel. Link frames are used to: Control secondary access to the channel.

Control bandwidth allocation to the secondaries.

5 Control inclusion of new stations into the cell.

Mark the end of channel usage (end of transmission.)

Creation and Initialization

The Radio Transmit Processes are created and initialized by the Point to Multipoint Link Process. At
10 creation time the Radio Transmit process initializes its parameters. At initialization time it creates the serial device handler for its channel and then creates event handlers for the transmit, modem change, and error interrupts and installs them into the serial device driver.

15 If the station is a primary the initialization either schedules the state that waits for the Data Set Ready (DSR) signal from the modem or, if DSR is present, schedules the state that begins the polling. If the station is a secondary, the initialization schedules the state that
20 waits for the secondary to be selected for transmission by the primary.

Primary Wait For DSR

This state waits for the radio modem to present DSR. When that event occurs, the state which does the polling is
25 scheduled. If the modem allows full duplex (simultaneous

transmission and reception), the Request To Send (RTS) signal is presented to the modem.

Primary Poll

Each secondary station has associated with it an
5 earliest time of the next poll. When the real-time clock exceeds that value, the station becomes eligible for receiving an invitation to transmit (a poll.) Each station also has a polling interval, which is a number that when added to the current value of the real-time clock yields
10 the earliest time of the next poll. Every time a station is polled, its polling interval is multiplied by a number greater than one and has a small constant added. When the receiver process detects that a secondary station has responded to the poll, it sets the polling interval to zero
15 and resets the earliest time of the next poll to the value of the real-time clock, thus making the station eligible for an immediate poll. This algorithm allows non responding secondary stations to be quickly removed from the polling, but also makes the penalty for a single missed
20 poll (perhaps due to radio interference) slight. A parameter of the link determines the maximum interval between polls of a non-responding station.

The primary can use the recent response patterns of the secondaries to allocate bandwidth among them by

including a maximum packet count in the invitation to transmit.

The primary can offer a chance for a secondary that is not included in the polling to become included by giving a
 5 invitation to register, in which any secondary may transmit a registration link frame. If any such frame is received by the receive process, it can be acknowledged by the primary and the station included in the polling. Of course this invitation to register may be answered by more than
 10 one secondary, in which case the responses would be scrambled at the primary and a frame specifying that no registration occurred would be sent. The secondaries would then have to back off and wait for some random number of registration invitations to pass before re-attempting a
 15 response.

The primary selects a secondary for polling if no secondary is currently using the channel and if there is a secondary which has an earliest time of next poll prior to the current value of the real-time clock.

20 If there are no packets for the primary to send and if none of the secondaries is currently eligible for a poll, the Primary Poll state reschedules itself and exits back to the dispatcher. If, however, the primary does have some frames to transmit, it schedules either the state that
 25 sends the frames (Primary Send), if it has a full duplex

channel, or it schedules the state that waits for the currently selected secondary to clear the channel (Primary Wait For No DCD.)

5 Primary Wait For No DCD

This state waits until the Data Carrier Detect (DCD) signal from the modem is dropped. The absence of this signal means that no secondary is using the channel. When the absence of DCD is detected, RTS is presented to the
 10 modem to begin transmission by this station. The state of the Clear To Send (CTS) signal of the modem determines whether a state to wait for CTS (Primary Wait For CTS) must be scheduled or whether the state that performs the send can begin immediately (Primary Send.)

15

Primary Wait For CTS

This state waits for the modem to present the Clear To Send (CTS) signal. When that signal is detected, this state schedules the state that performs the send (Primary
 20 Send.) If CTS is not detected after a reasonable time, the entire primary state machinery is restarted at Primary Wait For DSR.

Primary Send

This state sends (actually it queues frames to the device driver) outgoing packets that may have been queued to it by the Point to Multipoint Link Process' Outgoing Packet Handler state up to its maximum share of the channel bandwidth. If a secondary has not been selected, it then sends and end of transmission link frame. If a secondary has been selected, it sends an invitation to transmit frame to the secondary and increases the polling interval of the secondary before setting its earliest time of next poll.

10 It then schedules a state to wait for the transmission to complete (Primary Wait For Send Complete) and exits to the dispatcher.

Primary Wait Send Complete

15 This state waits until all of the frames that have been queued to the device driver have been sent before rescheduling the Primary Poll state. The big problem with this state is that interrupts may not be generated by the transmitter hardware and so the transmission may need to be nudged into activity again. This state reschedules itself

20 with a fairly short timeout while watching the state of the transmitter. It appears to have stopped it is nudged in activity. After a given number of nudges the transmission is abandoned and Primary Poll is scheduled anyway.

Secondary Wait For Selection

This state waits until it has received notification from the Secondary Receive process that transmission is allowed. If the radio is full duplex it schedules the Secondary Send state. Otherwise it must schedule the state that waits for the primary to

5 clear the channel before starting transmission Secondary Wait For No DCD.)

Secondary Wait For No DCD

This state waits for the primary to complete transmission and release the channel. Channel release is detected when the modem stops presenting the Data Carrier

10 Detect signal. When the loss of the signal is detected, this state raises Request to Send (RTS) to begin its own transmission. It checks to determine whether the modem is presenting Clear To Send (CTS). If so, sending can begin immediately and the state Secondary Send is scheduled. If not, then the secondary must wait for the CTS signal to be presented by the modem so the state Secondary Wait For CTS is scheduled.

15

Secondary Wait for CTS

This state waits for the modem to present the Clear To Send (CTS) signal. When the signal is detected, the state that performs the send, Secondary Send, is scheduled. If CTS is not presented within a reasonable time, the attempt to send is

20 abandoned and the initial state, Secondary Wait For Selection is scheduled.

Secondary Send

This state retrieves IP packets directly from the Link process queue and queues them to the device handler queue. It limits the number of packets it queues to the device handler based on the packet count contained in the invitation to transmit from the

5 primary. Each packet is checked to insure that it has a good frame check sequence and that its time to live has not been exceeded and that it did not arrive on this link (that means that it was misdirected by the primary). If any of these conditions hold the packet is discarded. After all of the outbound IP packets have been queued to the device handler, an end of transmission link frame is queued to the device handler. The state

10 Secondary Wait For Send Complete is scheduled with a timeout and this state exits to the dispatcher.

Secondary Wait Send Complete

The big problem solved by this state is that the transmission hardware

15 occasionally drops interrupts so that the sending process stops prematurely. This state watches over the transmission process by rescheduling itself at short intervals and checking on the progress. If the transmitter has stopped prematurely it is nudged back into action. If too many nudges are required the transmission is abandoned. After the transmission successfully completes or is abandoned, the initial state, Secondary Wait

20 For Selection, is scheduled and this state exits back to the dispatcher.

Primary Receiver Process

The Primary Receive Process is responsible for receiving frames at a primary station.

5

Creation and Initialization

Both the creation and initialization functions are called by the Radio Transmit Process. The creation function initializes the parameters. The Initialization function creates and initializes the receive event handler and then inserts the event handler into the serial device driver. It then schedules the main state, Process, and blocks the process on reception of a frame before returning the caller.

10

Process

This state processes a single received frame. If more frames are available it reschedules itself with no block. If no more frames are available it reschedules itself with a block on the reception of a frame.

15

If the received frame is a link frame it must notify the Radio Transmit process of the frame. If the frame is an IP packet, the state must determine whether the packet has a multicast destination address and if it does, copy it and enqueue it onto the Link

process' outgoing packet queue. The original packet, multicast or not, is enqueued to the router.

Secondary Receive Process

- 5 The Secondary Receive process is responsible for receiving frames from the primary and then acting upon the frames that are destined to this station.

Creation and Initialization

- 10 Both the creation and initialization functions are called by the Radio Transmit Process. The creation function initializes the parameters. The Initialization function creates and initializes the receive event handler and then inserts the event handler into the serial device driver. It then schedules the initial state, Not Selected, and blocks the process on reception of a frame before returning the caller.

- 15 Not Selected

This state receives frames from the primary waiting for a frame that selects this station for reception or transmission when such a frame is received it either notifies the Radio Transmit task or schedules the state Selected.

- 20 Selected

This state receives frames destined for this station. It must examine link frames to determine when the primary selects another station. When this occurs, it schedules the state Not Selected, blocks waiting for a new frame and exits to the dispatcher. It must also examine the IP source address of the packet to insure that it has not received a packet destined from this station to another station in the cell. This state only receives one frame before yielding control to the dispatcher. If there are more frames available it reschedules itself. If there are no more frames available it reschedules itself and blocks waiting for a received frame.

10 SLIP

Serial Line Internet Protocol (SLIP) is an unofficial standard that is very frequently used in the internet world to move Internet Packets over serial lines. It defines a simple framing sequence and escape sequences to allow binary data to be sent with no danger of a data character being mistaken for a framing character. Metric

15 Systems has added non-IP link frames to SLIP to allow one side of the link to exchange link data with the other side. Currently the only data exchanged is an occasional keep-alive frame when no other data is flowing across the link. The keep-alive frame prevents an internal link (an internal link is one that links two Metric Systems routers) from being declared down. When an internal link goes down, route discovery is started

(if available) to find alternate paths. Link frames are never sent on external links to equipment other than that of Metric Systems.

SLIP Link Process

The SLIP link process is responsible for setting up both of the processes
 5 necessary for SLIP communications and also for informing the router of the links
 presence and also for creating the serial device handler. In addition there is within the
 link process a finite state automaton for handling the transmission of packets and link
 frames.

10 Creation and Initialization

The creation function initializes parameters and creates a SLIP Receiver process.
 The initialization function creates and initializes event handlers for transmission events,
 modem events, and error events. It creates and initializes a serial device handler and
 sets the event handlers into the serial device driver. It initializes the SLIP Receiver
 15 process. It adds this link to the router's database. It then schedules the Startup state and
 returns to the caller.

Start Up

This state raises the Data Terminal Ready signal to the modem and then
 20 schedules the main state, Process., before exiting to the dispatcher.

Process

This state constantly re-schedules itself blocking on a time out and also packets being available from the router. The restart on timeout allow the state to send a link
 5 frame as a keep-alive if no other frames were sent and the link is internal. On every entry this state determines whether the link is up or down by analyzing the receiver activity and the state of the modem's Data Set Ready (DSR) signal. The router and its route daemon are notified of any change. If IP packets are available for transmission, one of them is checked and sent if its time to live has not expired. If there is not enough
 10 memory to safely operate, the Link queue is reduced to half its former size while preferably preserving routing packets and packets with immediate delivery type of service.

SLIP Receiver Process

15 The SLIP Receiver process is responsible for receiving frames from the other side of the link.

Creation and Initialization

The creation function initializes the parameters. The initialization function creates and initializes a receive event handler and sets it into the serial device handler. It then schedules the main state, Process, and returns to the caller.

5 Process

This state constantly reschedules itself with a wait. If no frames are received within several wait intervals it notifies the SLIP Link process of the lack of activity. If the frame is a link frame the SLIP Link process is notified of activity on the line. If the frame is an IP packet its header frame check sequence is examined and if it is good, the
10 packet is queued to the router and the link is notified of activity. If it is not good the packet is discarded.

The serial device handlers control the hardware that communicates with the radios.

While particular embodiments of the present invention have been disclosed, it is
15 to be understood that various different modifications are possible and are contemplated within the true spirit and scope of the appended claims. There is no intention, therefore, of limitations to the exact abstract or disclosure herein presented.

CLAIMS

1. What is claimed is:

A method of wireless networking, comprising:

providing a remote terminal unit;

5 creating a transmission protocol with an Internet Protocol for the remote

terminal unit; and

sending the created protocol.

2. A method according to claim 1, wherein the created protocol includes slip

frames containing an Internet Protocol packet and other frames containing link control

10 information.

3. A system for wireless networking, comprising:

providing a remote terminal unit;

means for creating a transmission protocol with an Internet Protocol for the

remote terminal unit; and


15 means for sending the created protocol.

4. A system according to claim 3, wherein the created protocol includes slip frames containing an Internet Protocol packet and other frames containing link control information.

METHOD AND APPARATUS FOR WIRELESS NETWORKING**ABSTRACT OF THE DISCLOSURE**

A method and apparatus for wireless networking employs a wireless protocol
5 module and a wireless device interface module for controlling a remote terminal unit,
whereby the modules integrate the remote terminal unit software and wireless
networking application software.

Overall Embedded Networking RTU

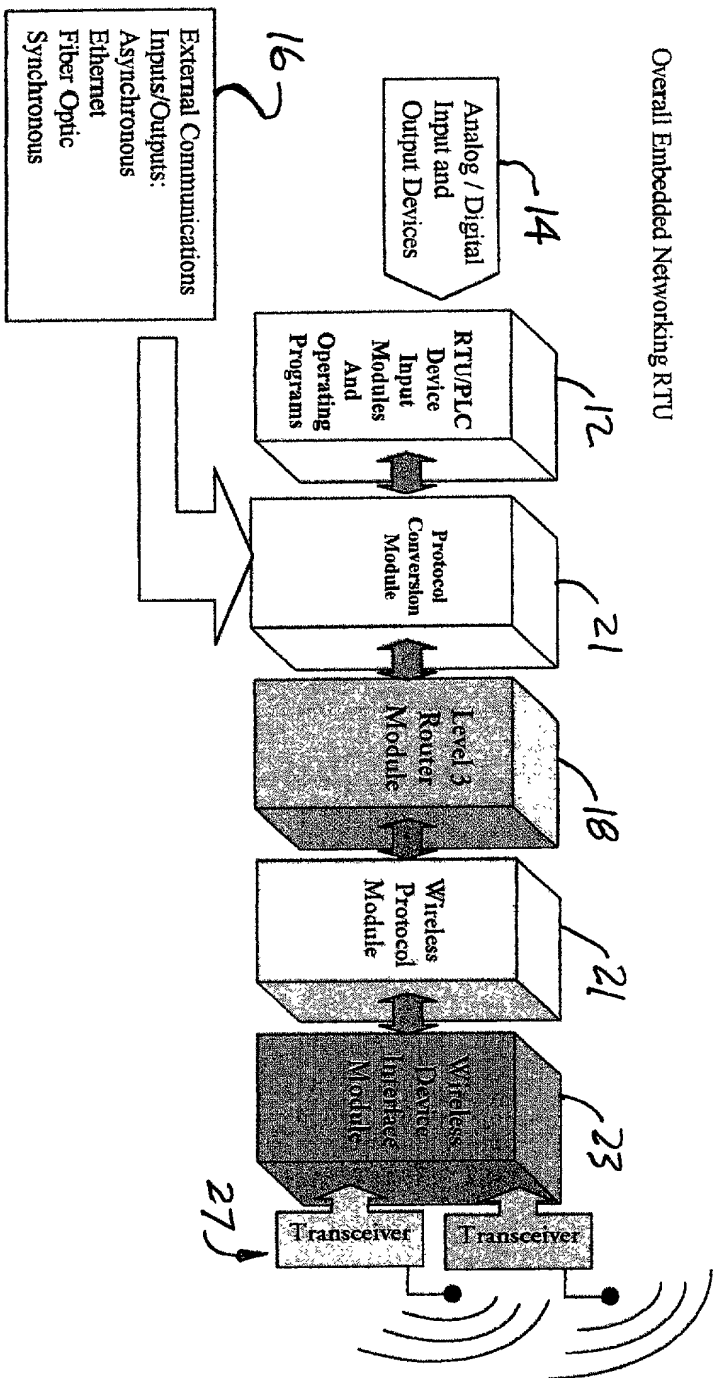

Basic System Operation:

Module	Function
RTU/PLC Input device	Converts Physical and virtual parameters datagrams that are bi-directional transferred to the protocol conversion module
Protocol Conversion module	Converts the instrumentation time discrete information into an IP base protocol that can be routed and serviced by the embedded IP router
Level 3 Internet protocol Router	Internally routes the instrumentation data packets to the appropriate wireless cell also maintains internal network map of all connecting links
Wireless protocol Module	This module manages five functions required to create reliable links to multiple users within the radio range of each attached transceiver: 1. Establishes one or more multi-access wireless cells

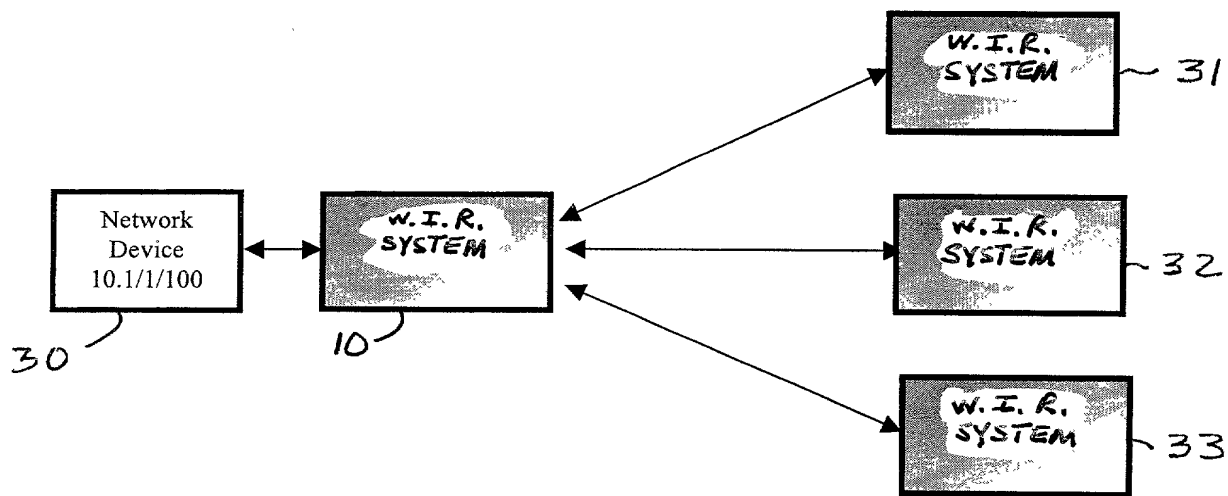


FIG. 2

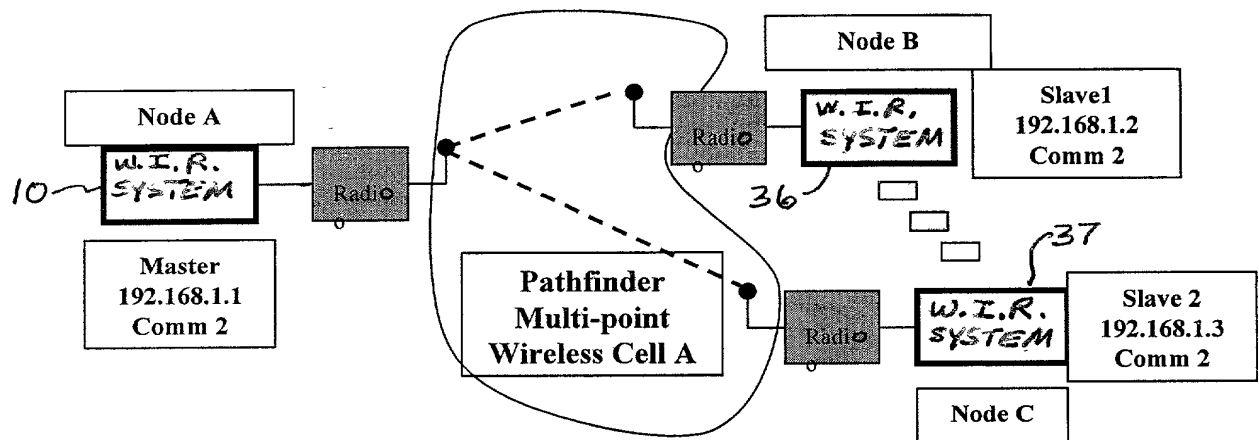


FIG. 3

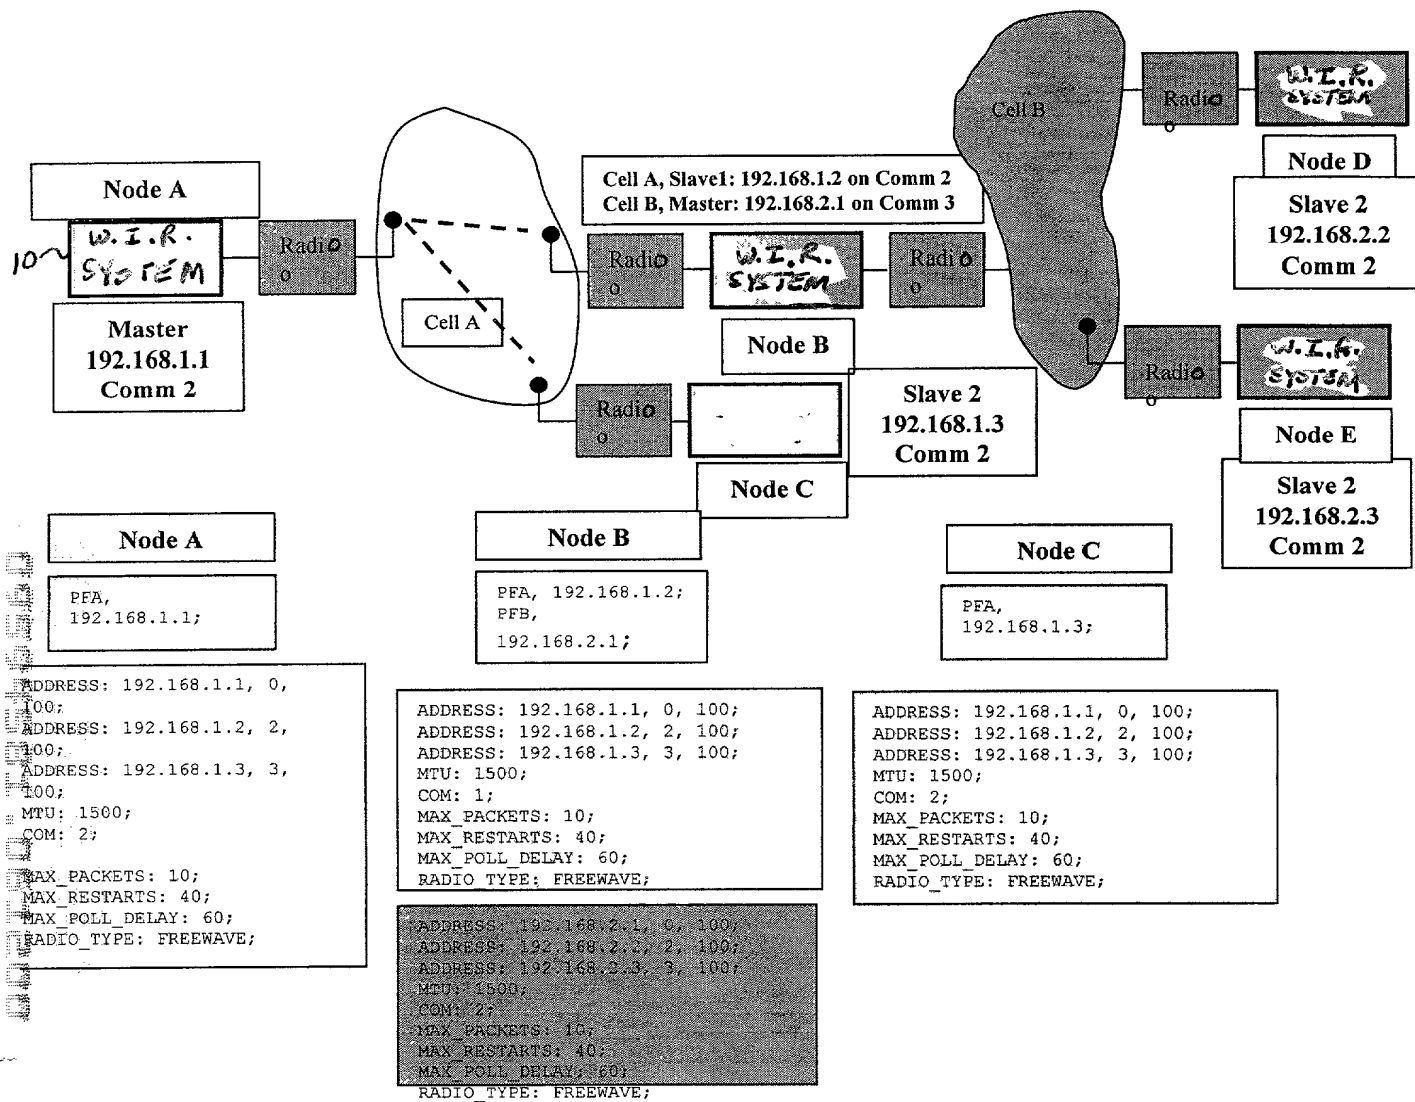


FIG. 4

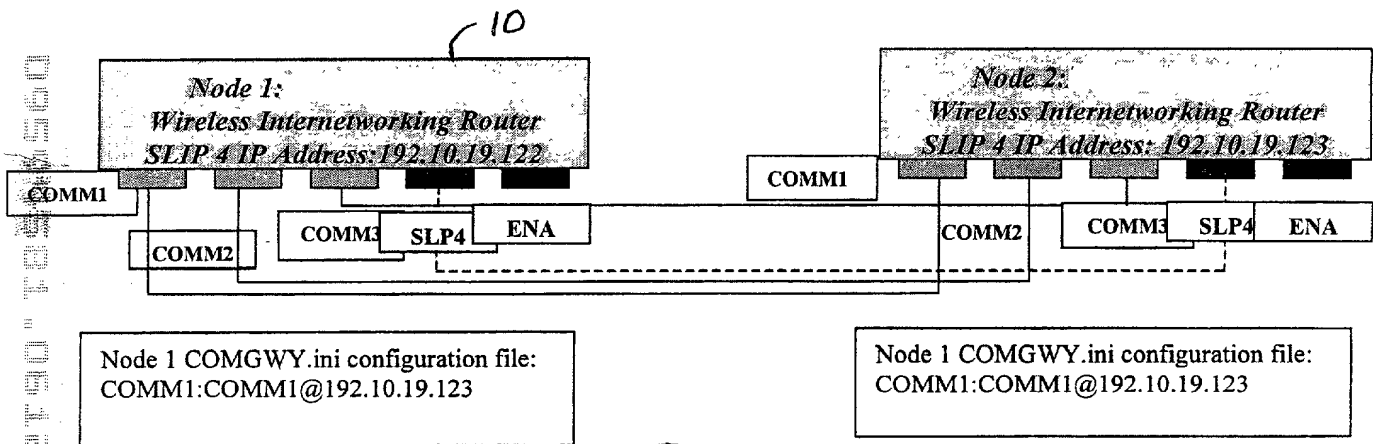


FIG. 5

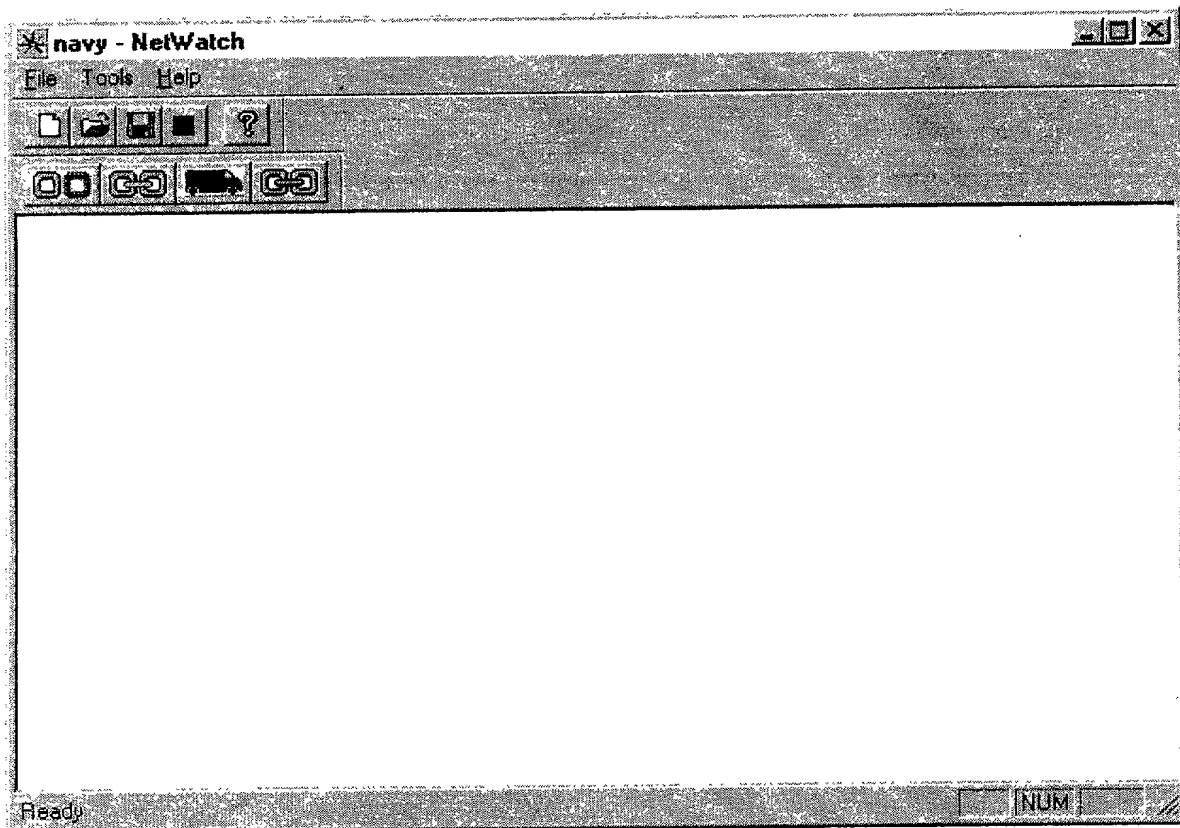


FIG.6

002150 134630

Define New Node

Name

Description

FIG. 7.

New Link [X]

Link Protocol: ☒ SLIP ☐ Pathfinder

Routing: ☒ Internal ☐ External

IP Address:

FIG. 8

002750 18546560

Probe Control




IP Address	Name	Description
192.99.2.4	Station 99	Multi System Console

Round Trip Times (ms)		
Low Deviation	Mean	High Deviation
33	485	30
Minimum	Current	Maximum
380	440	10000


Sent	Received	Time Out
5833	4832	727

Parameters

Sample Significance	Maximum Wait Time	Probe Interval
1/10	10000	1000

100



Start

Pause

Halt

Add

Delete

Find

FIG.9

Select for Detailed Display

Success	IP Address	Name	Description
100%	192.7.2.2	Station7	Firehall 1
100%	192.1.2.1	Station1	CNX1
100%	192.2.2.1	Station 2	CNX2
100%	192.3.2.1	Station 3	CNX3
100%	192.4.2.2	Station4	BNX4
100%	192.5.2.2	Station 5	RNX5
100%	192.8.2.2	Station 8	Maple Ridge Firehall 1
100%	192.9.2.5	Station 9	Maple Ridge Firehall 3
100%	192.10.2.2	Station 10	Maple Ridge Firehall 2

Details

Done

FIG.10

002150-18546550

Integrity Results

IP Address: 192.10.2.2

Name: Station 10

Description: Maple Ridge Firehall 2

Round Trip Times (ms)

Low Deviation	Mean	High Deviation	Percent Success
108	628	148	100
Minimum	Current	Maximum	Time Out
270	1001	10000	1008

Reset OK

FIG.11

e Transfer

New Transfer

Send

Receive

Done

Completion Status

Check

Cancel

FIG.12

Select Node

IP Address	Name	Description
192.39.2.1	Node 39	Relay

Select Cancel

FIG.13

File Transfer

Local Schedule Start Edit Pause Stop All Remote

Mon, Nov 24, 10:47 AM Start Time

0, 00:03:47 Time until Start

0 Port 69

0 8 3000 3000

Block Number Retries Mean Response Time Response Time Out




FIG. 14

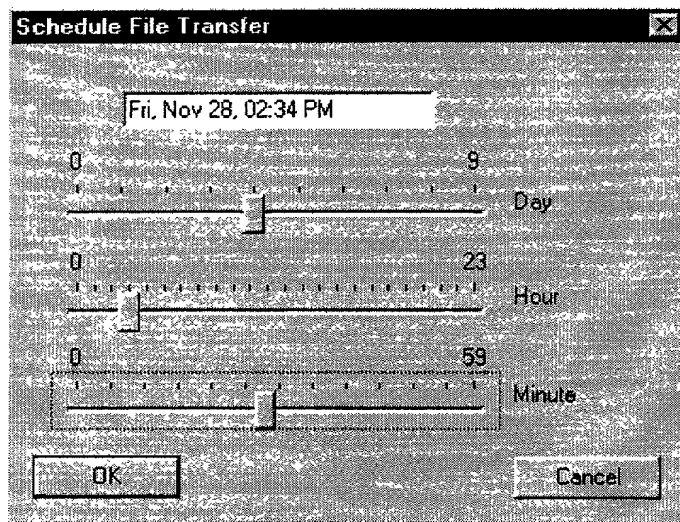


FIG. 15

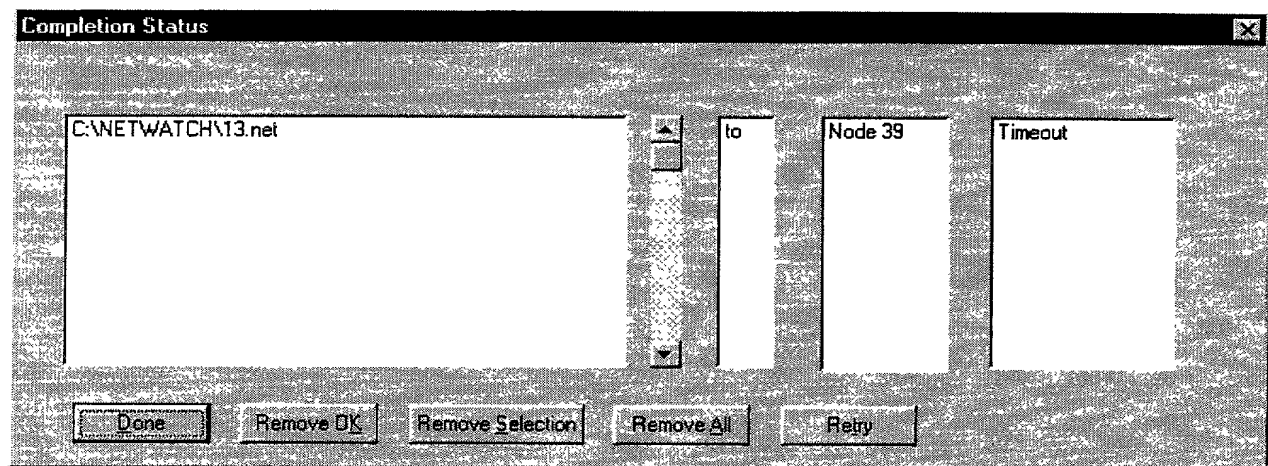


FIG. 16

Link Process

Creation called from the
system initialization
program

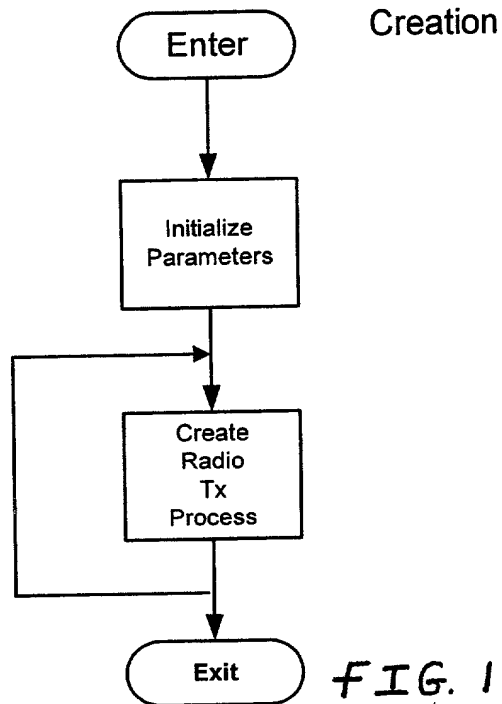


FIG. 17

Point-to-Multipoint Processing

Link Process

Initialization called from the
system initialization program

Initialization

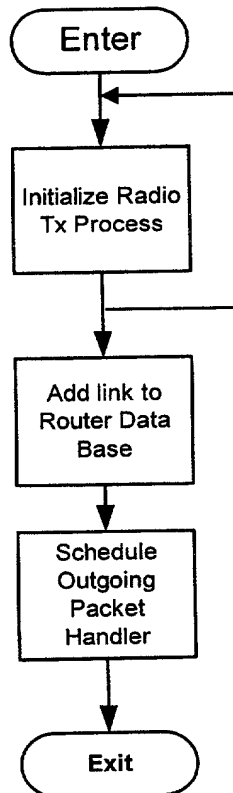


FIG. 18

Point-to-Multipoint Processing Link Process

Invoked by the dispatcher
on packet arrival or 1
second timeout

Outgoing packet Handler

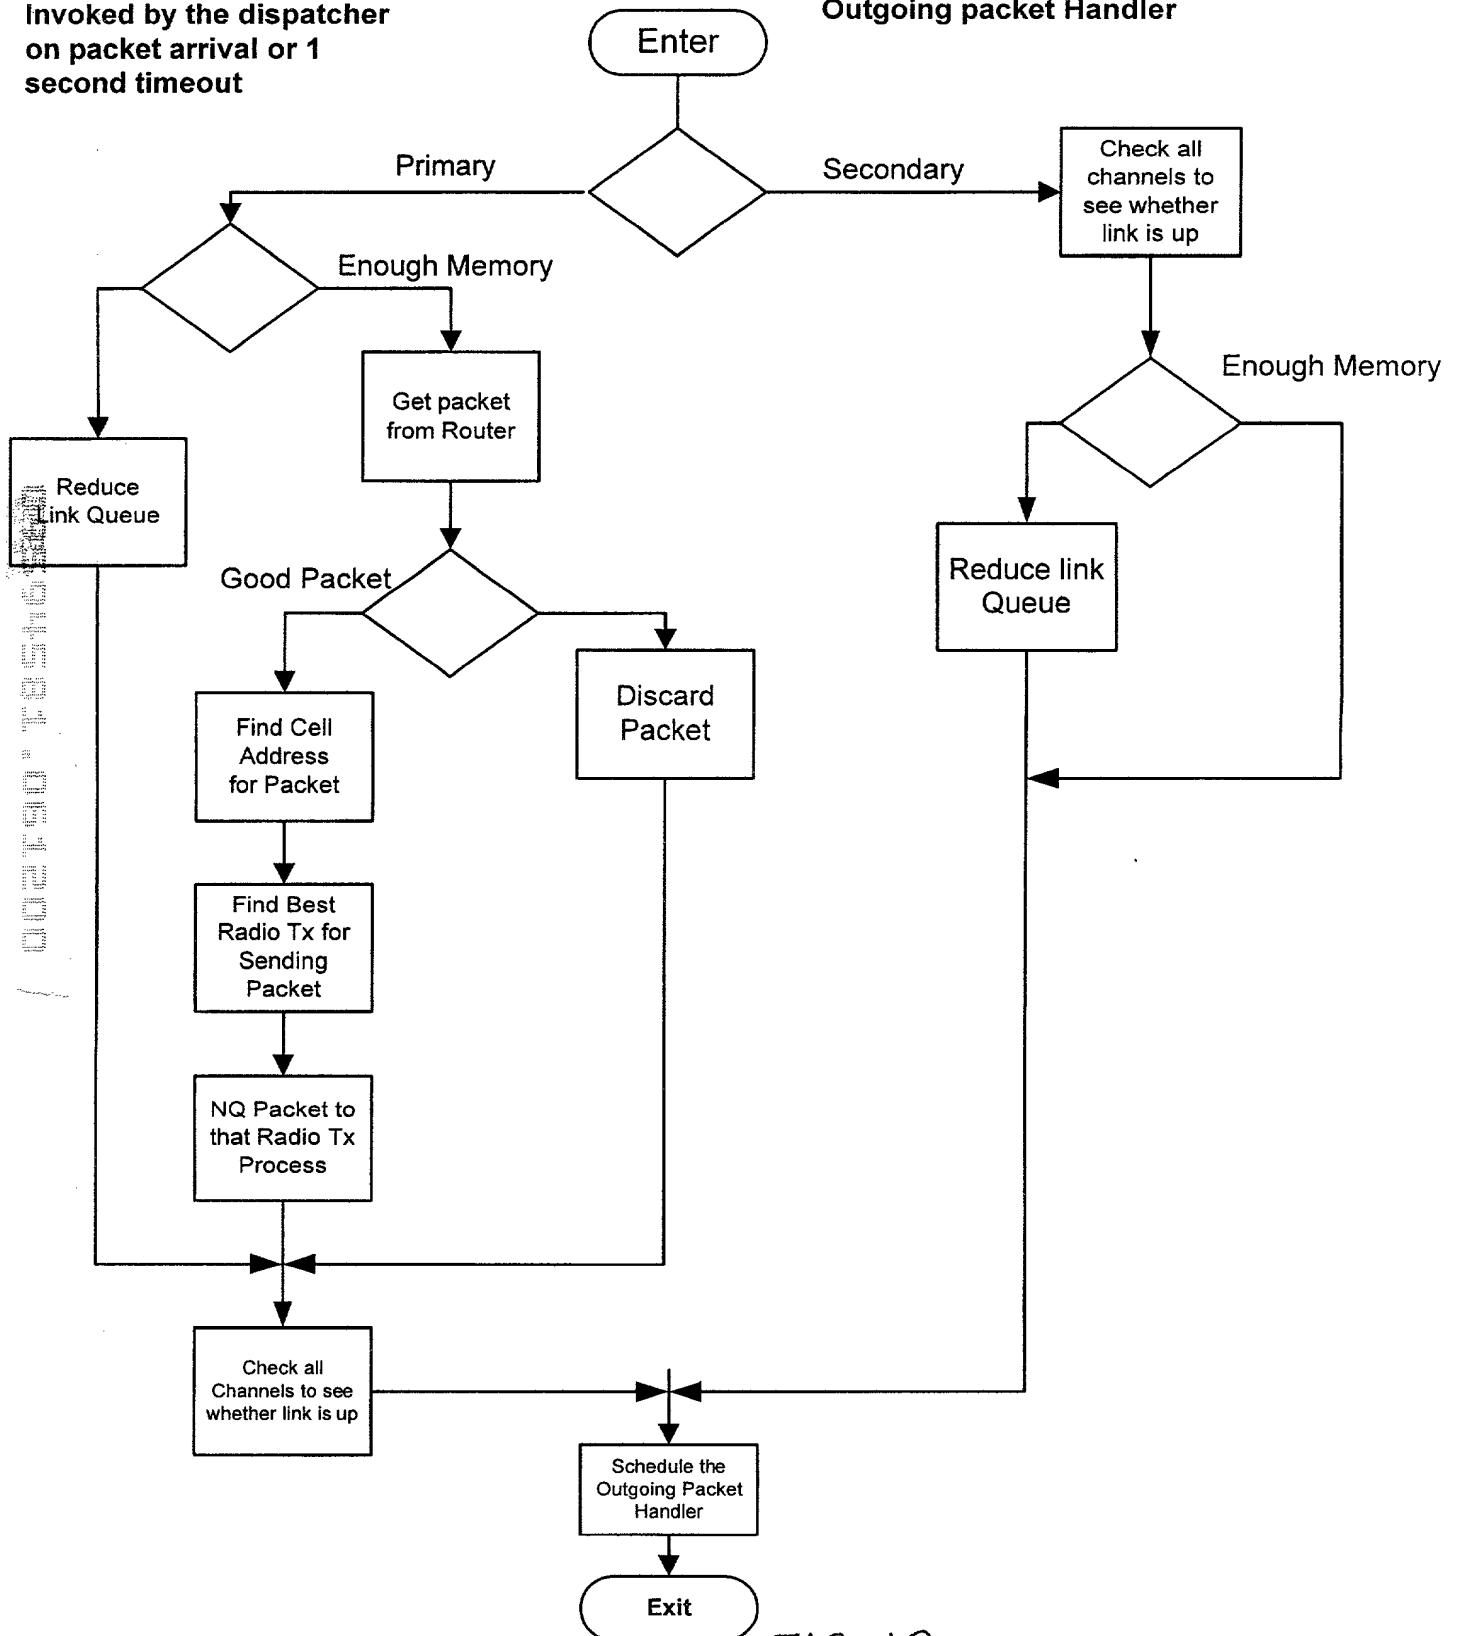


FIG. 19

Point-to-Multipoint Processing

Radio Tx process

Called from link process
initialization

Initialization

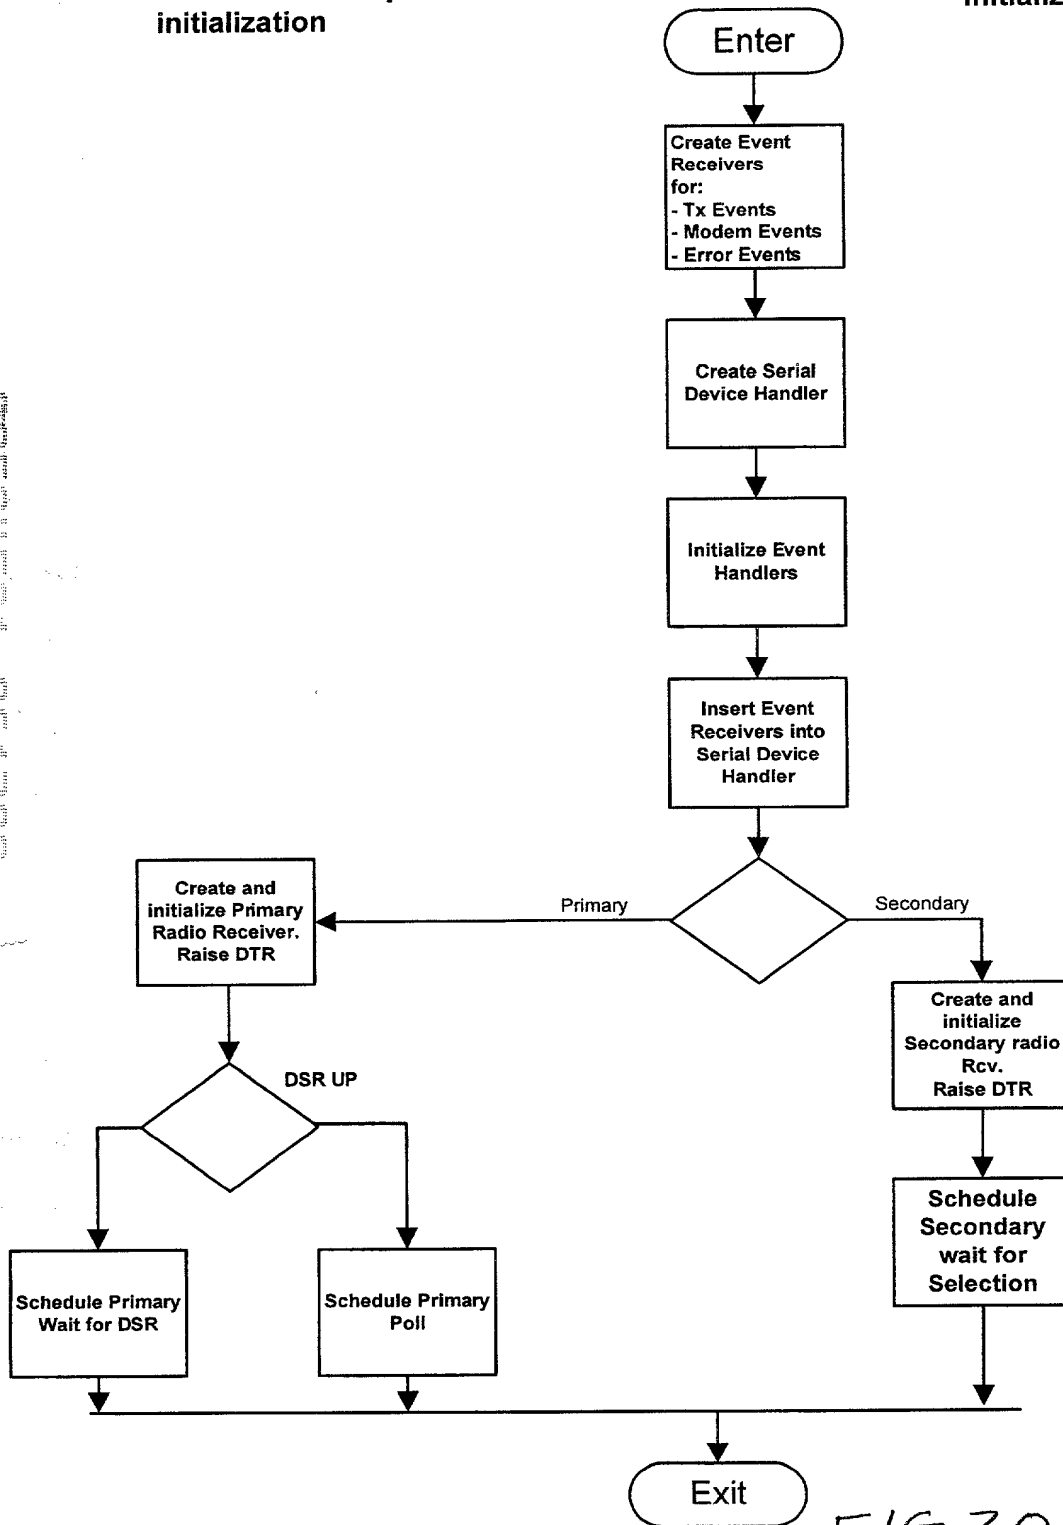


FIG. 20

Point-to-Multipoint Processing

Radio Tx process

Radio Tx Process Called
from Link Process
Creation

Creation


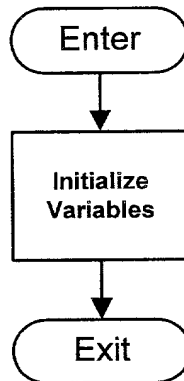


FIG. 21

Point-to-Multipoint Processing

Radio Tx Processing

Invoked by the dispatcher on a modem signal or one second timeout

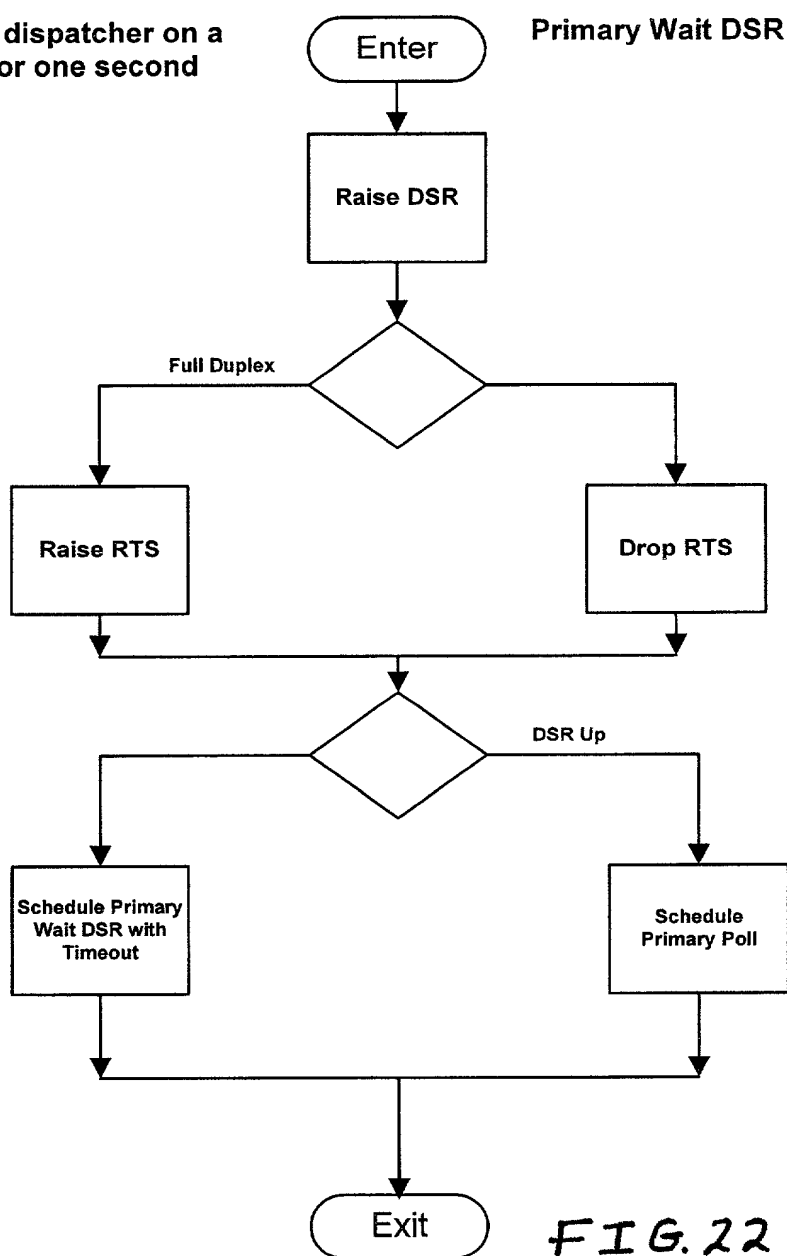

Point-to-Multipoint Processing

Radio Tx Process

Invoked by the dispatcher on receipt of a packet

Primary Poll

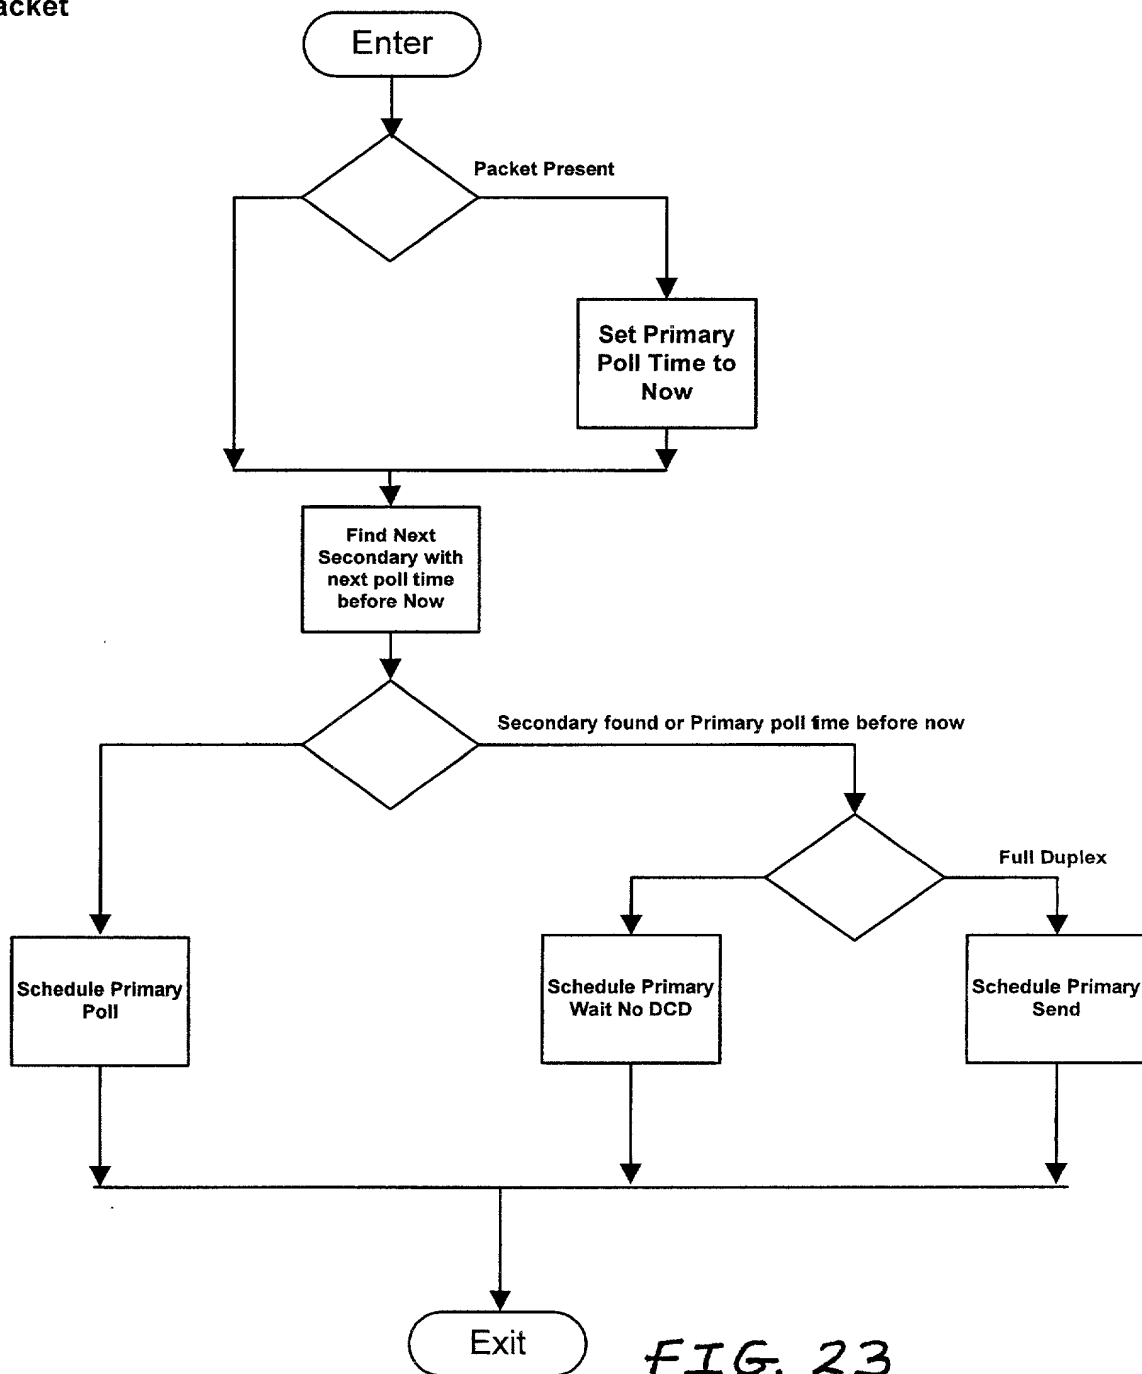


FIG. 23

Point-to-Multipoint Processing

Radio Tx Process

Invoked by the dispatcher

Primary Wait No DCD

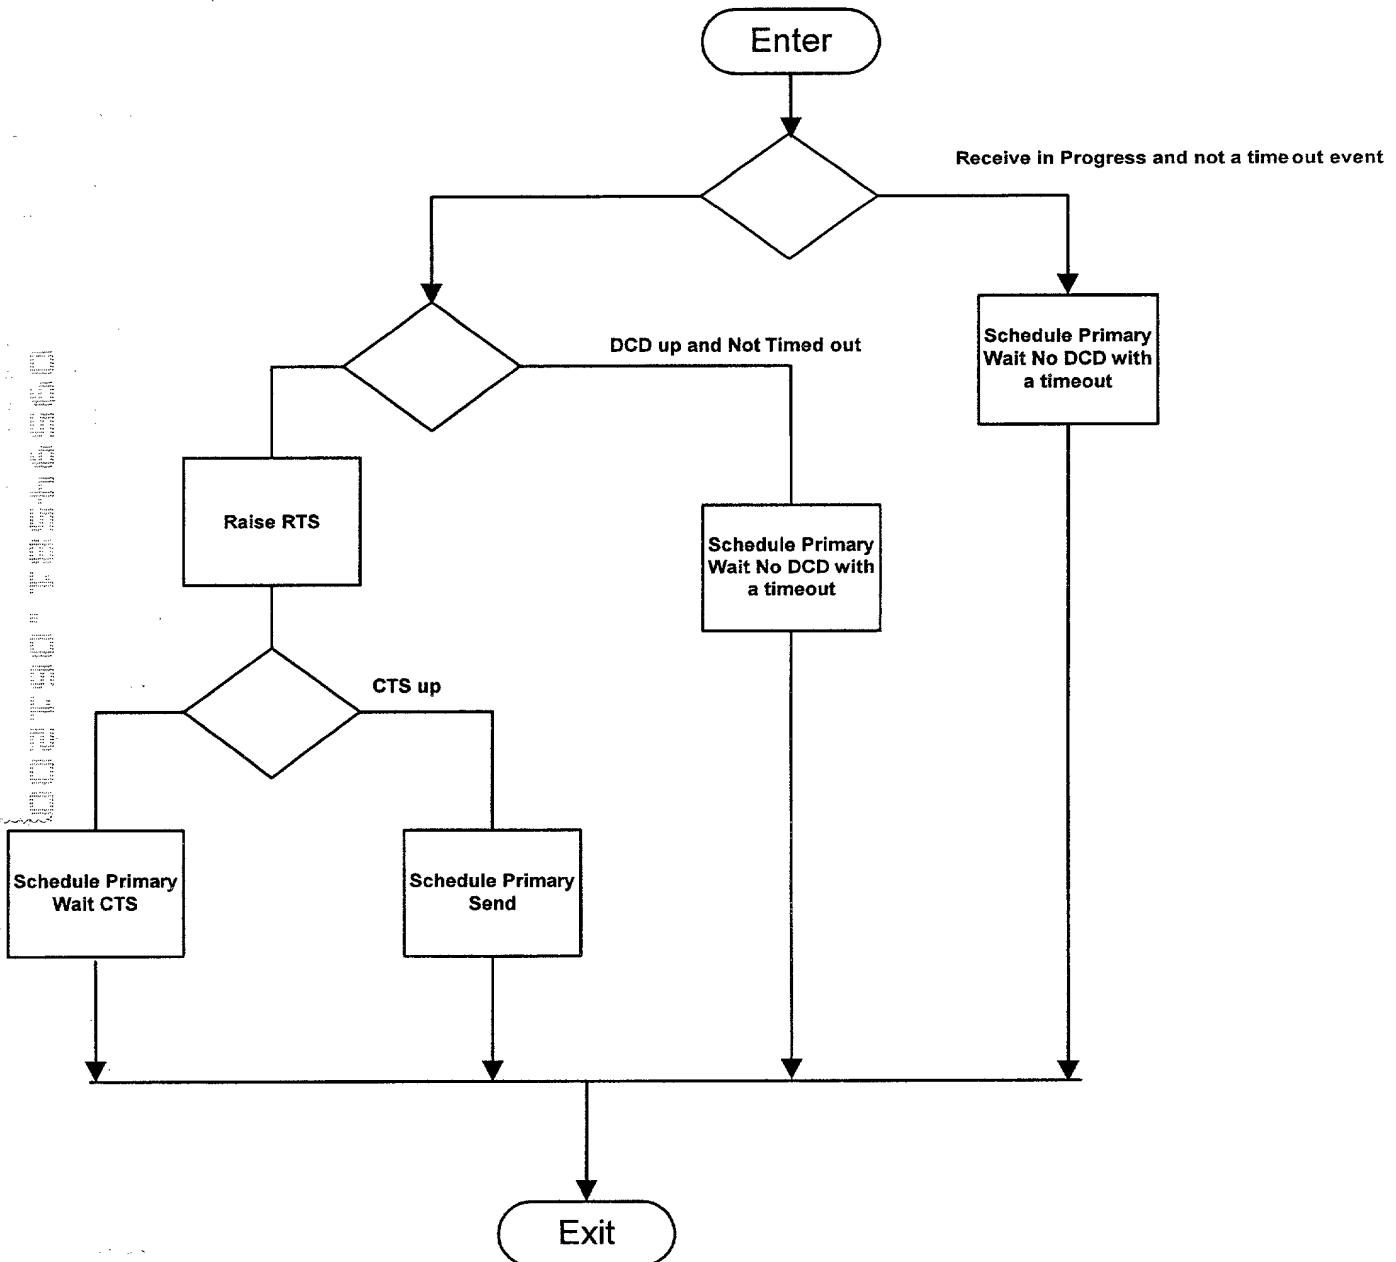


FIG. 24

Point-to-Multipoint Processing

Radio Tx Process

Invoked by the dispatcher

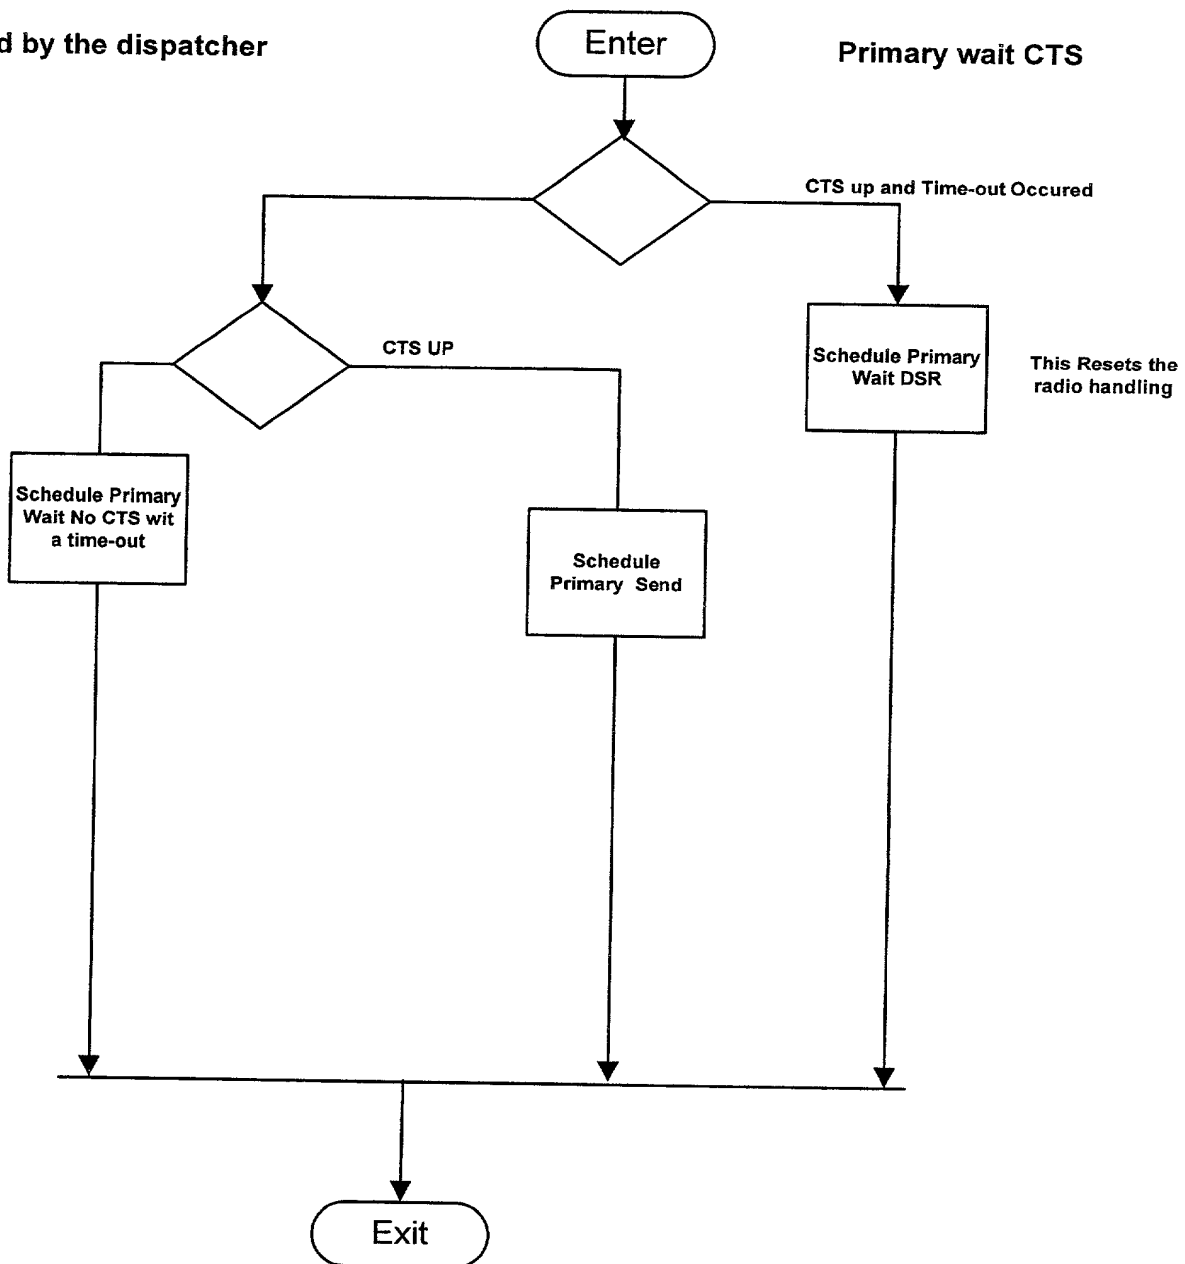


FIG. 25

Point-to-Multipoint Processing

Radio Tx Process

Invoked by the dispatcher

Primary Send

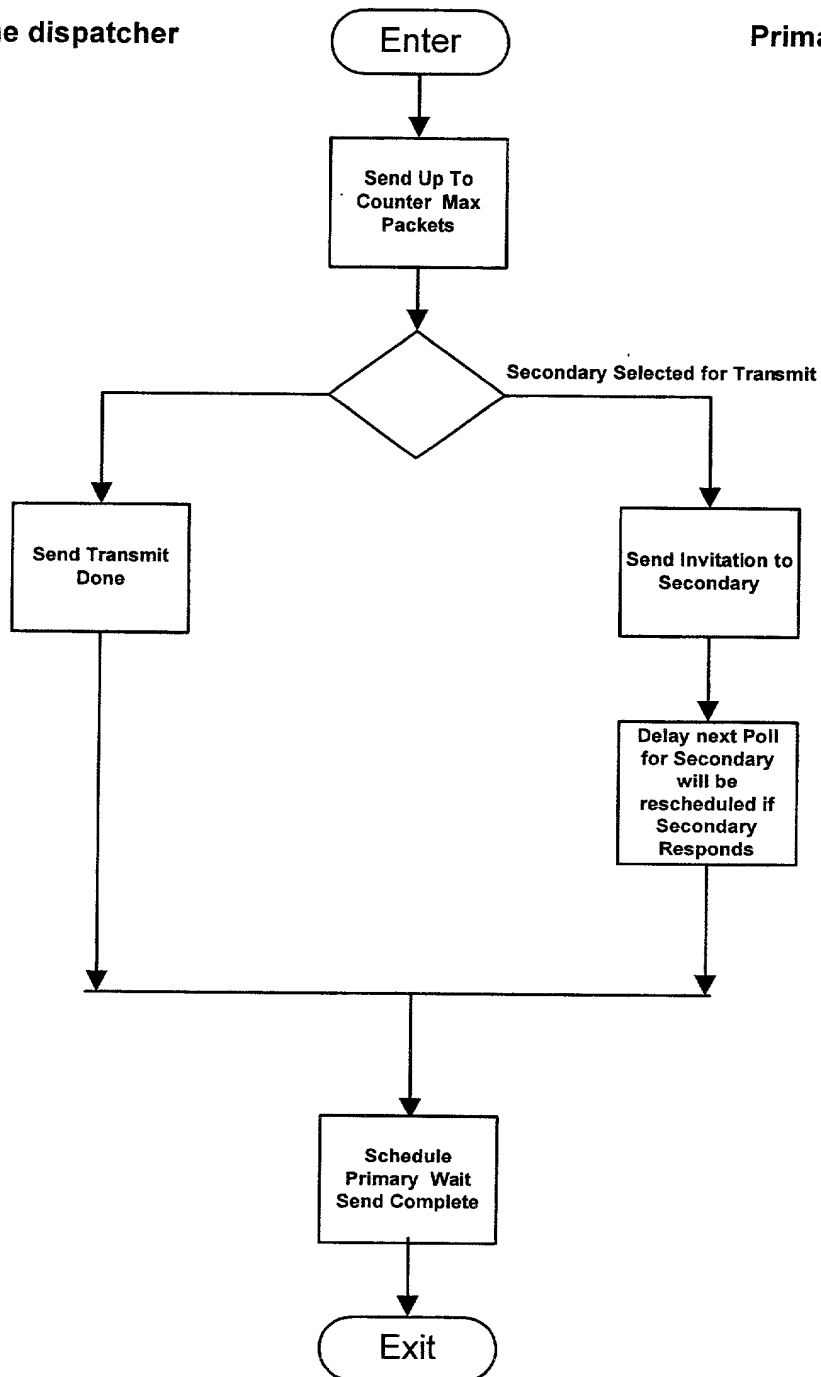


FIG. 26

Radio Tx Process

Invoked by the dispatcher

Primary Wait Send Complete

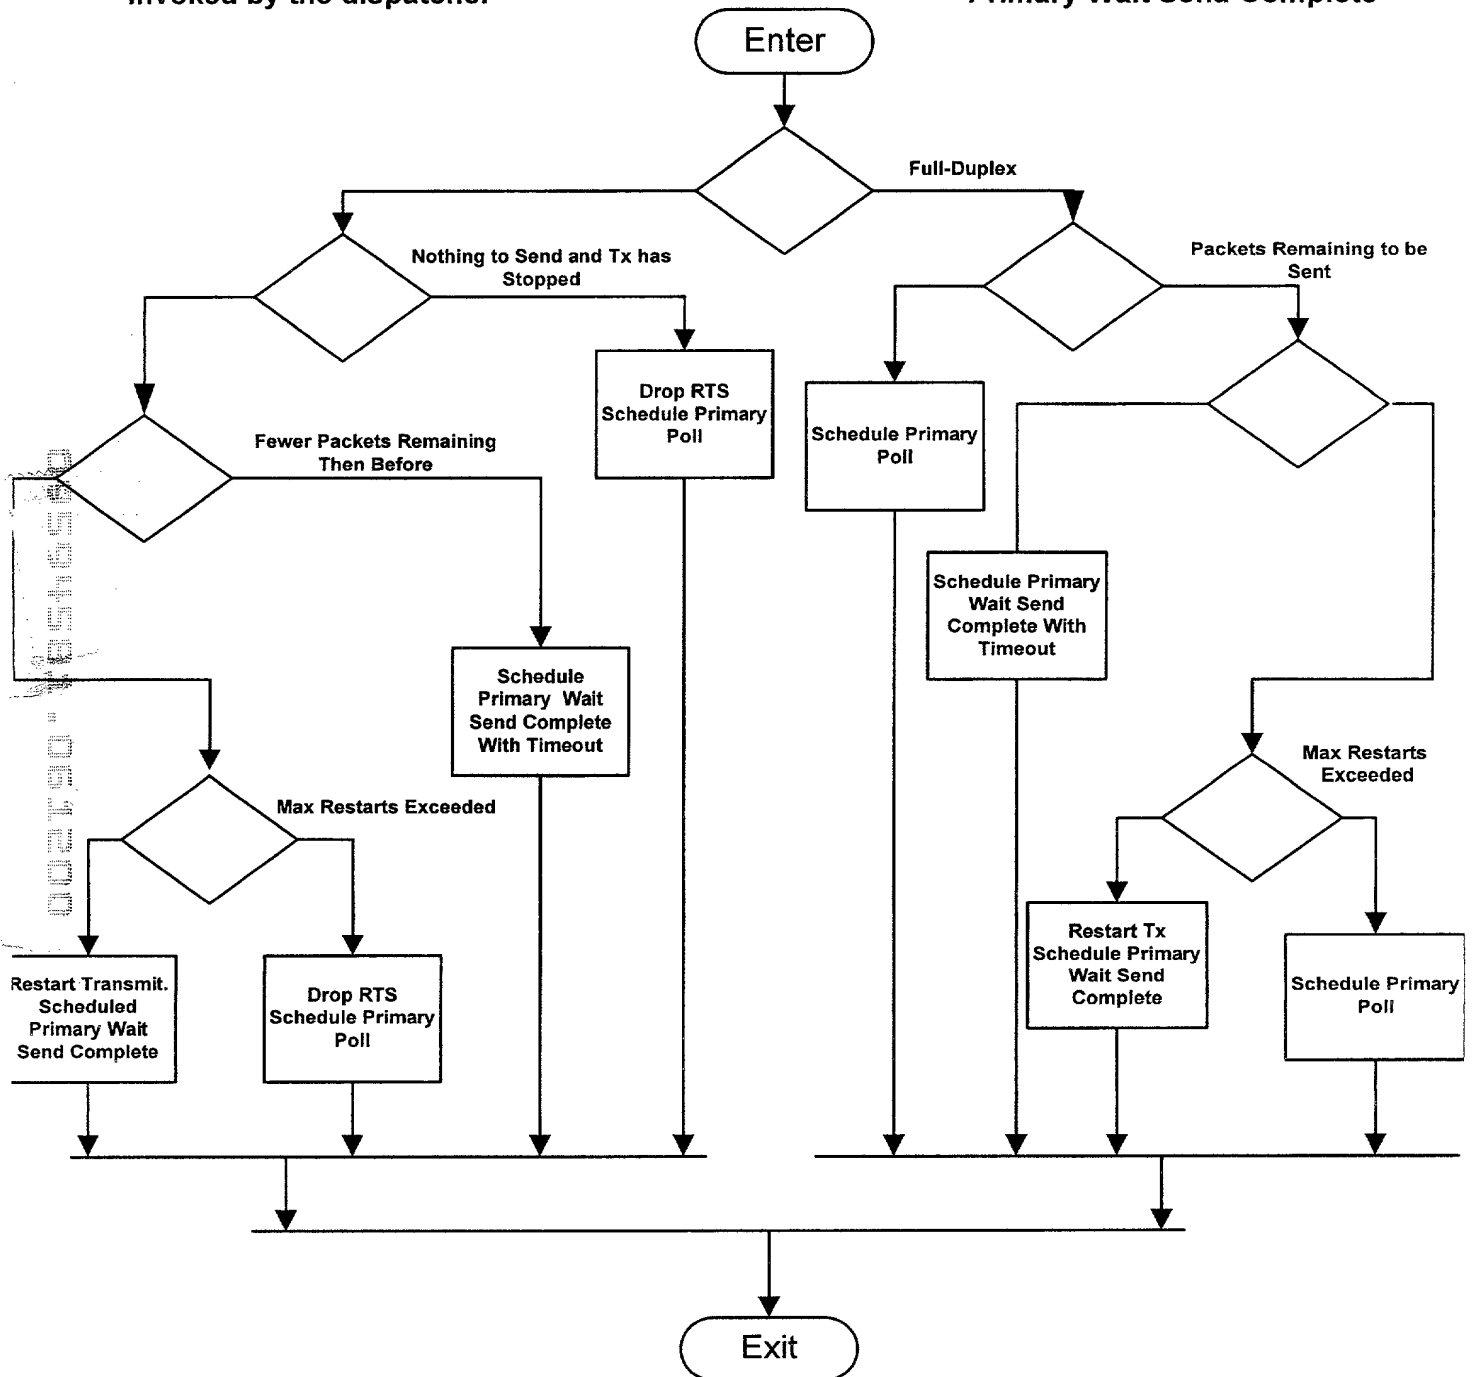


FIG. 27

Point-to-Multipoint Processing

Radio Tx Process

Invoked by the dispatcher

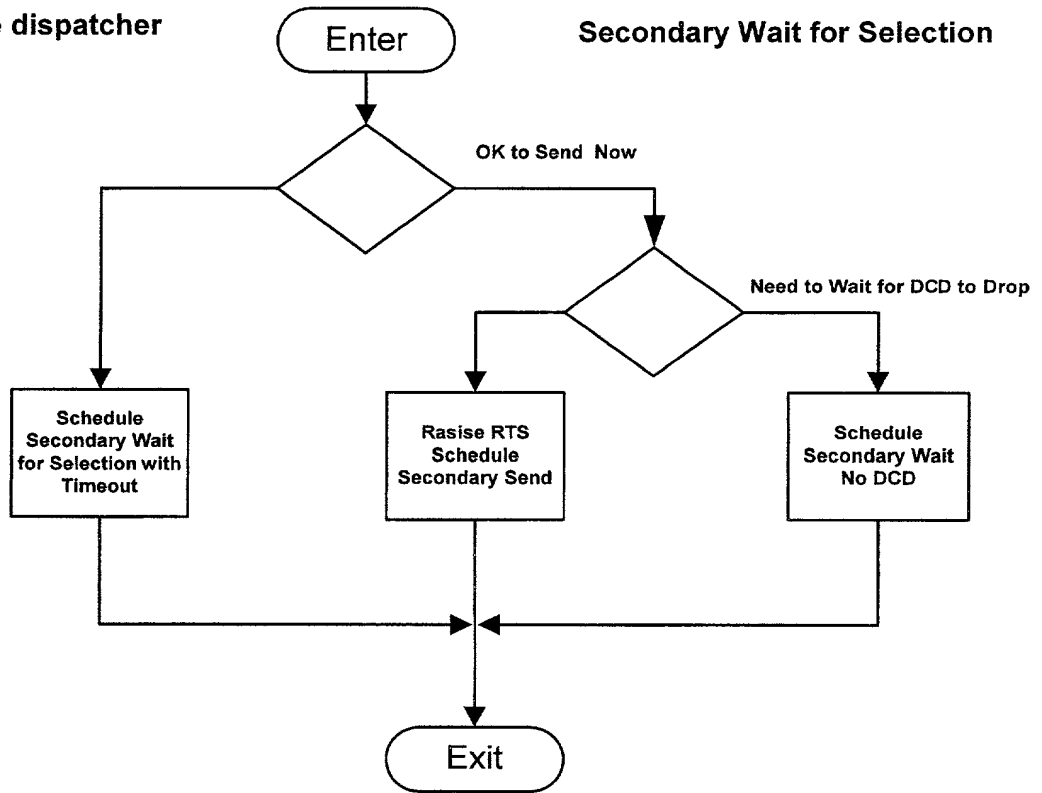


FIG. 28

Point-to-Multipoint Processing

Radio Tx Process

Invoked by the dispatcher

Secondary Wait No DCD

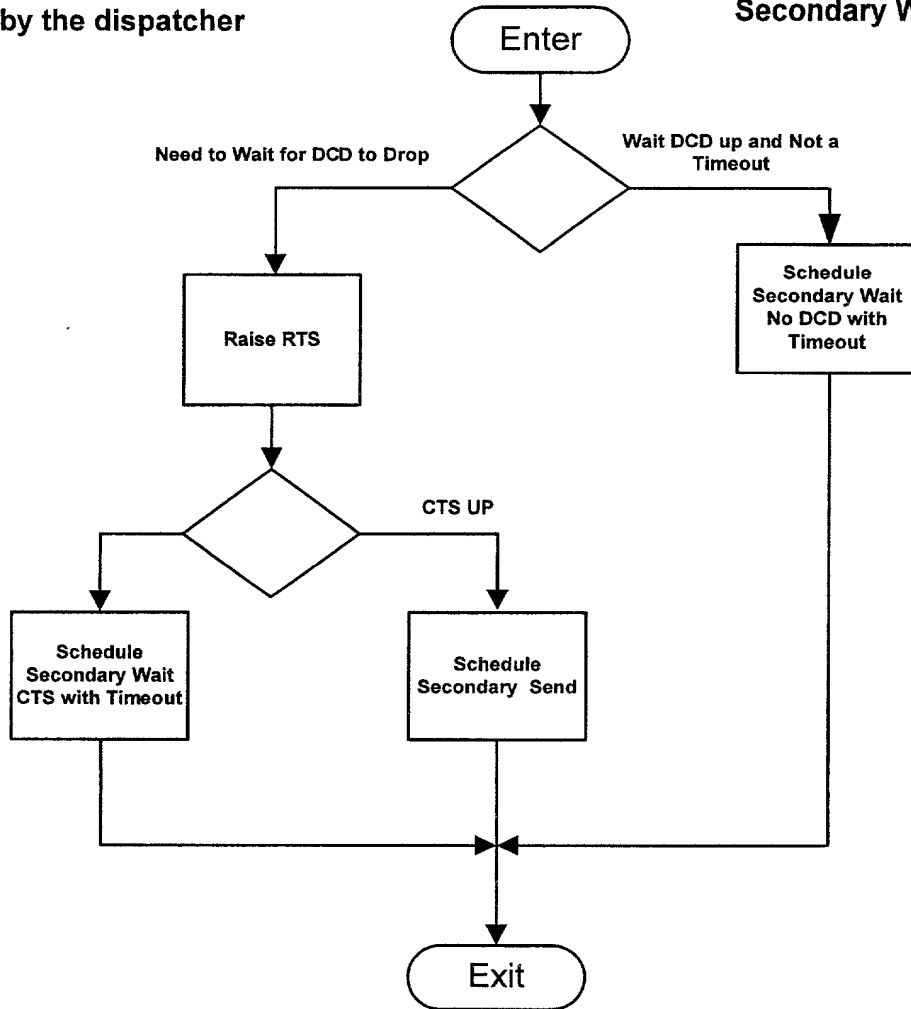


FIG. 29

Point-to-Multipoint Processing

Radio Tx Process

Invoked by the dispatcher

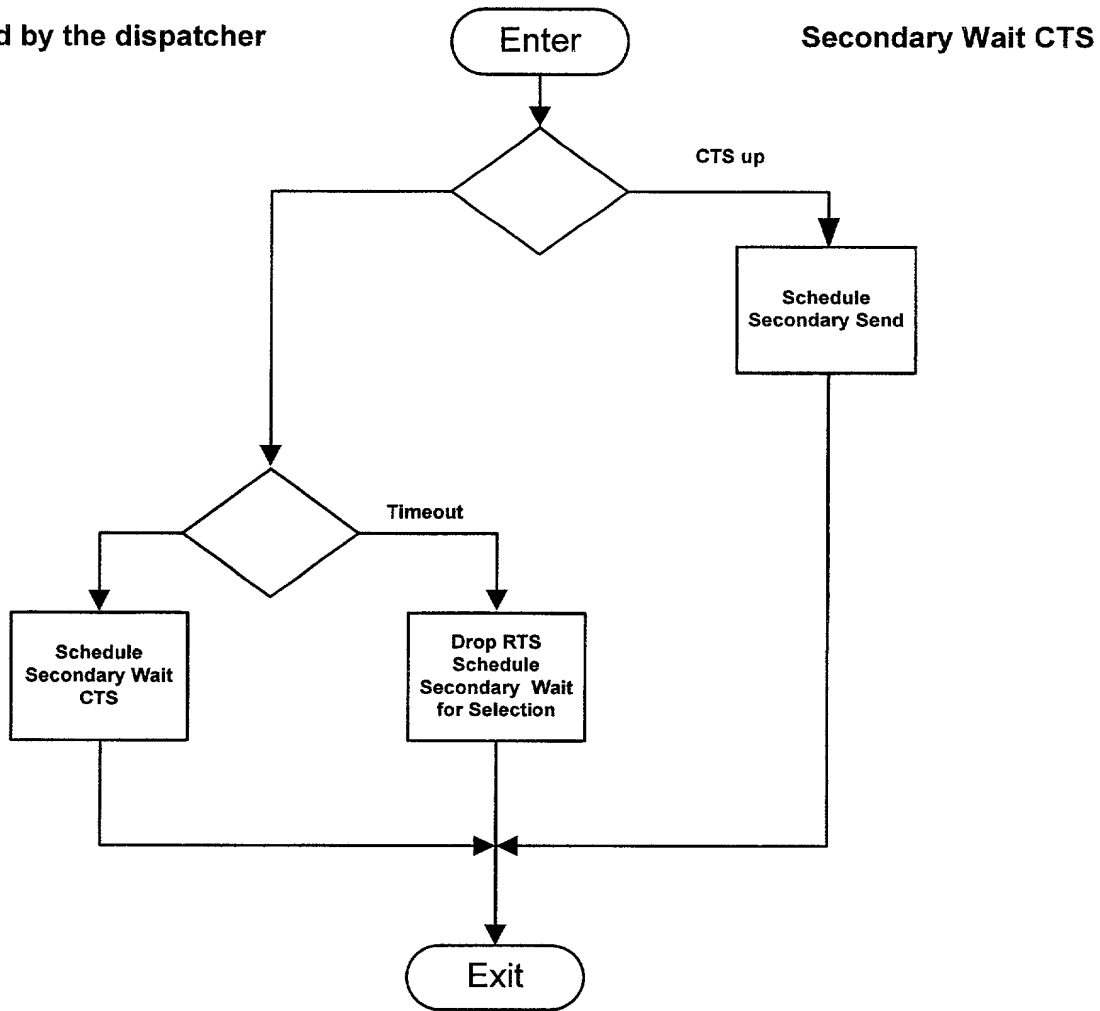


FIG. 30

Point-to-Multipoint Processing

Radio Tx Process

Invoked by the dispatcher

Secondary Send

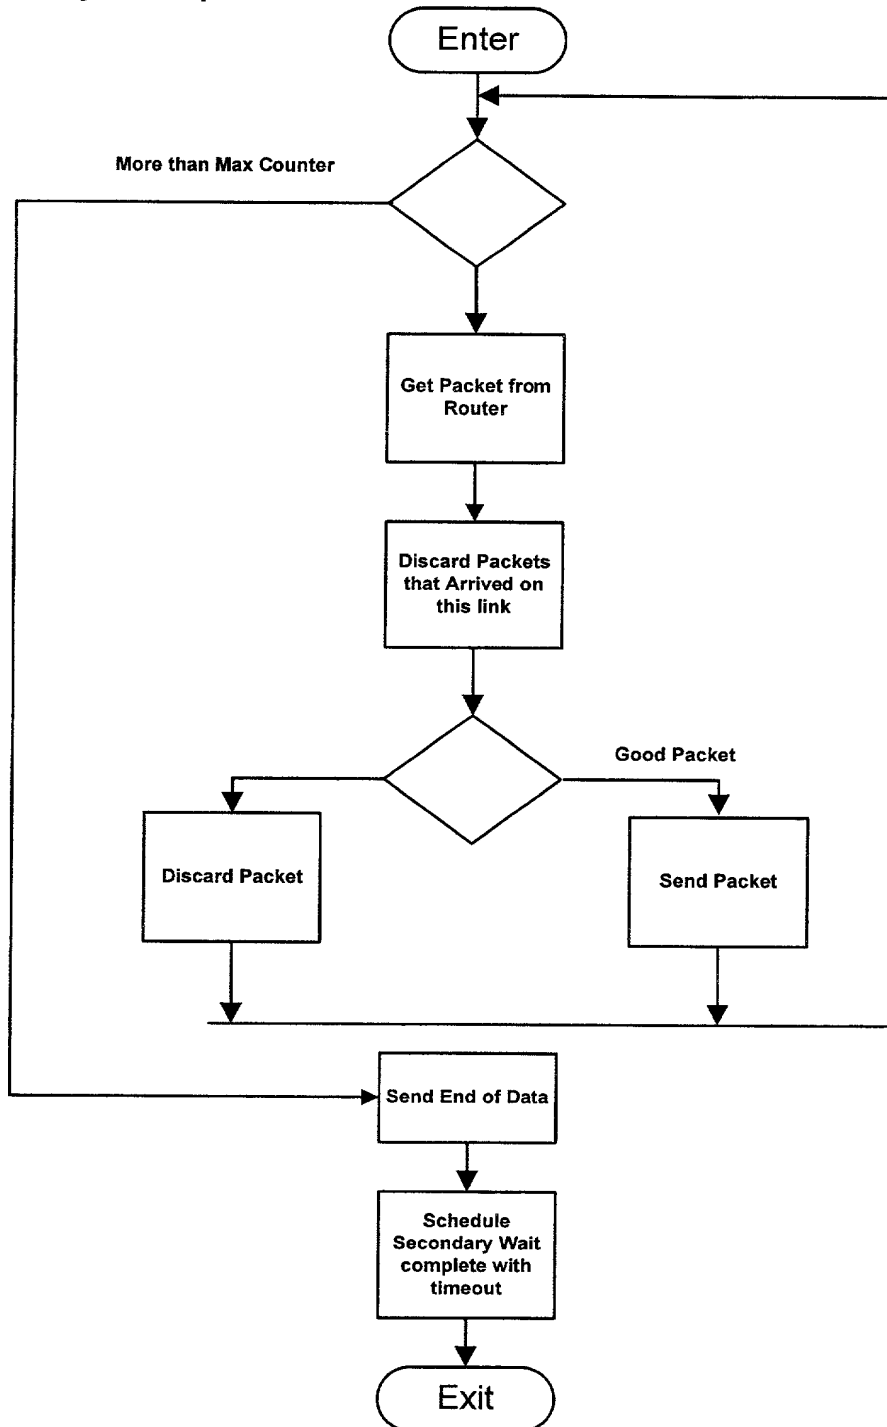


FIG. 31

Point-to-Multipoint Processing

Radio Tx Process

Invoked by the dispatcher

Secondary Send


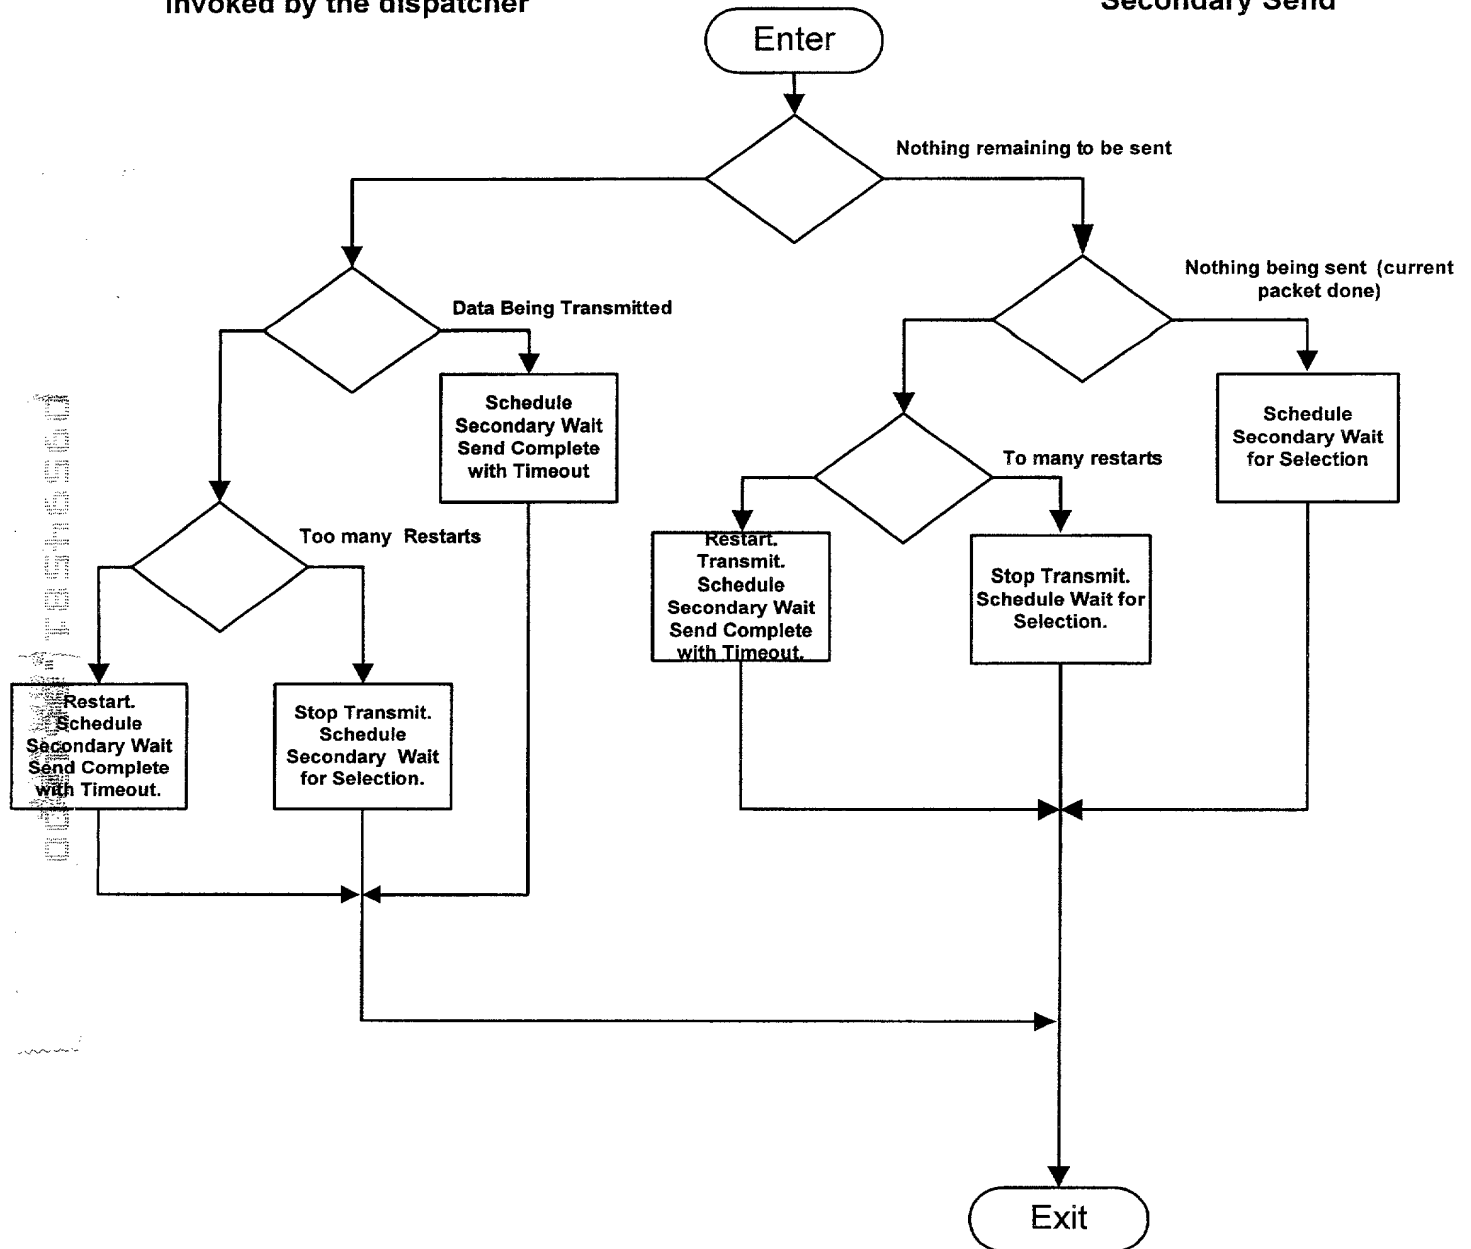


FIG. 32

Point-to-Multipoint Processing

Primary Receiver Process


Called by Radio Tx Creation

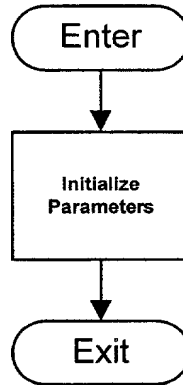

Create

FIG. 33

Called by Radio Tx Initialization

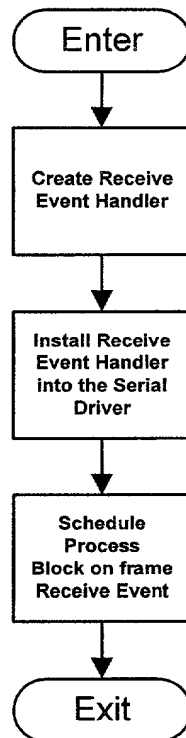

Initialization

FIG. 34

Point-to-Multipoint Processing

Primary Receive Process

Invoked by the dispatcher

Primary wait CTS

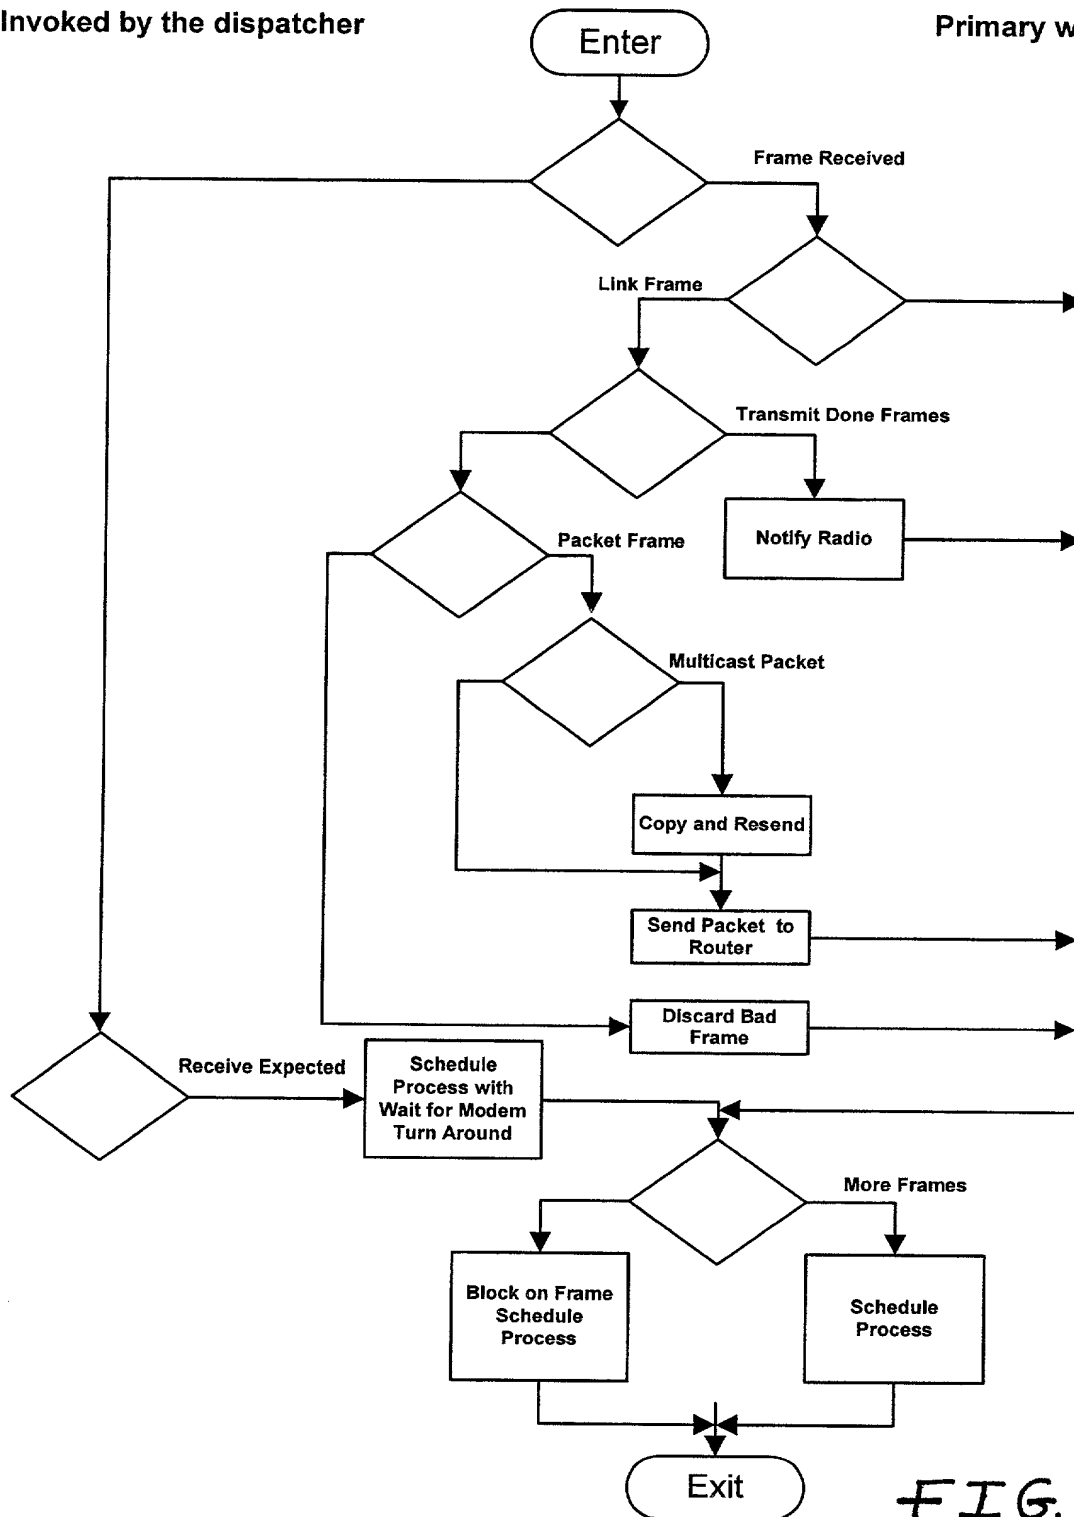


FIG. 35

Point-to-Multipoint Processing

Secondary Receive Process

Called by Radio Tx

Create

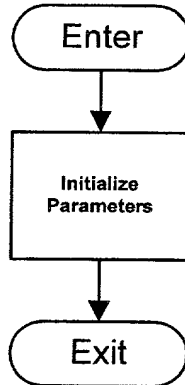


FIG. 36

Called by Radio Tx Initialization

Initialization


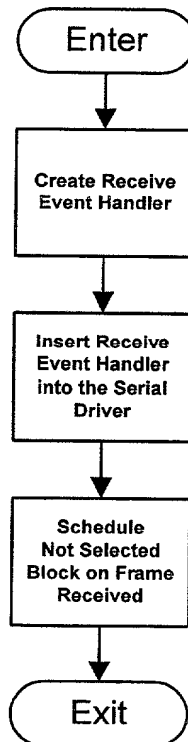


FIG. 37

Point-to-Multipoint Processing

Secondary Receive Process

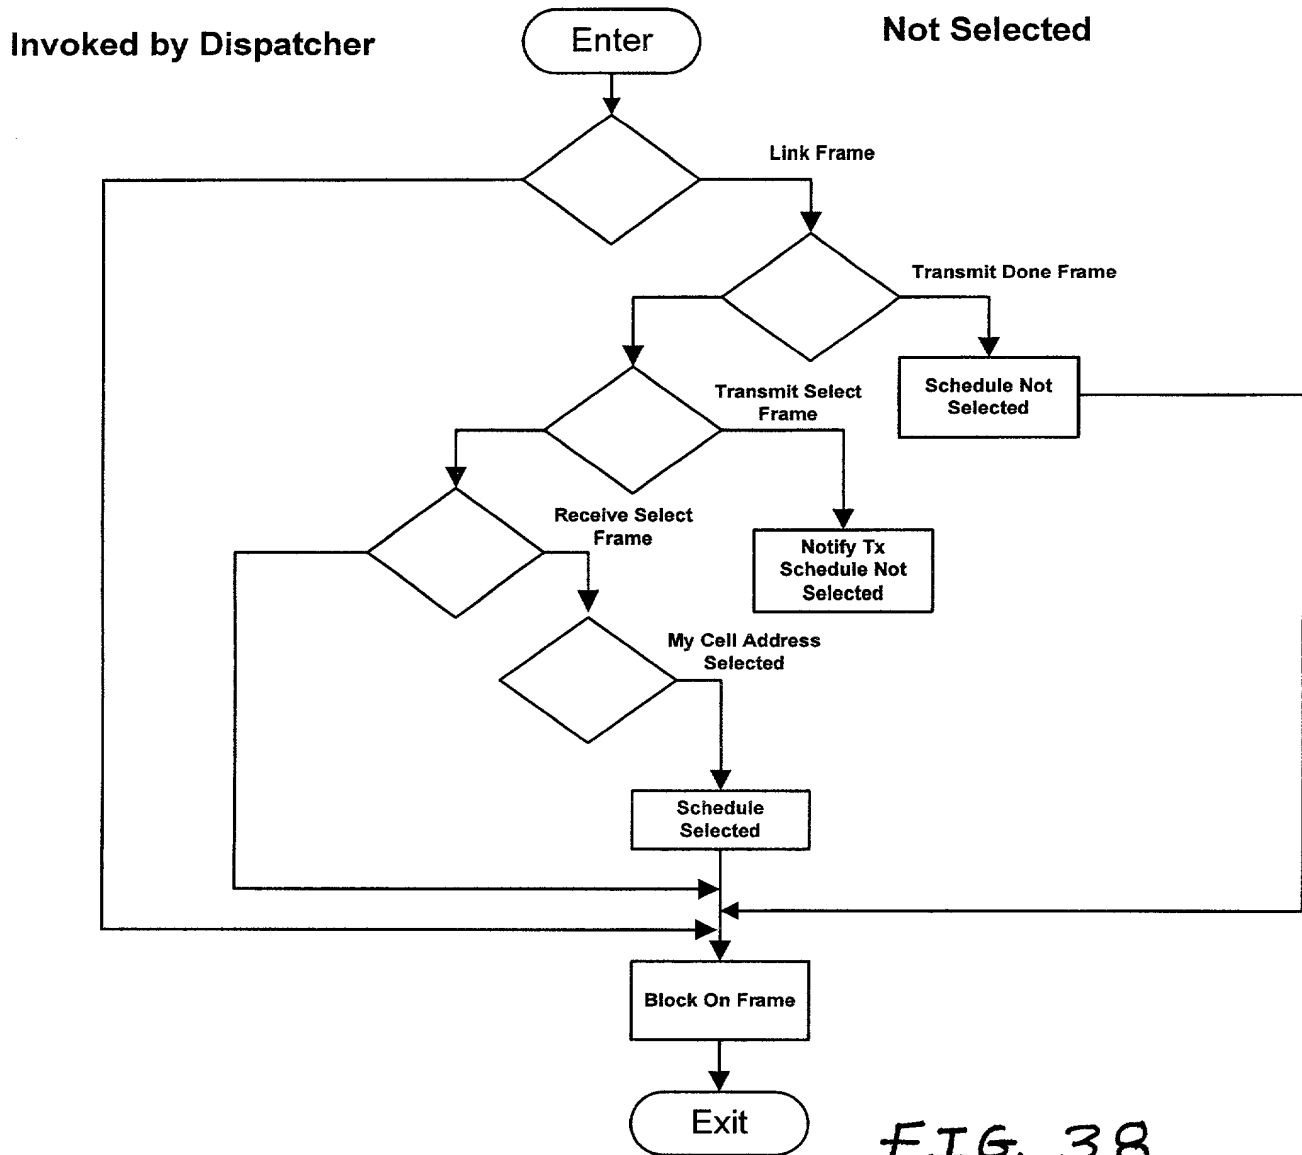

Point-to-Multipoint Processing

Invoked by Dispatcher

Secondary Receive Process

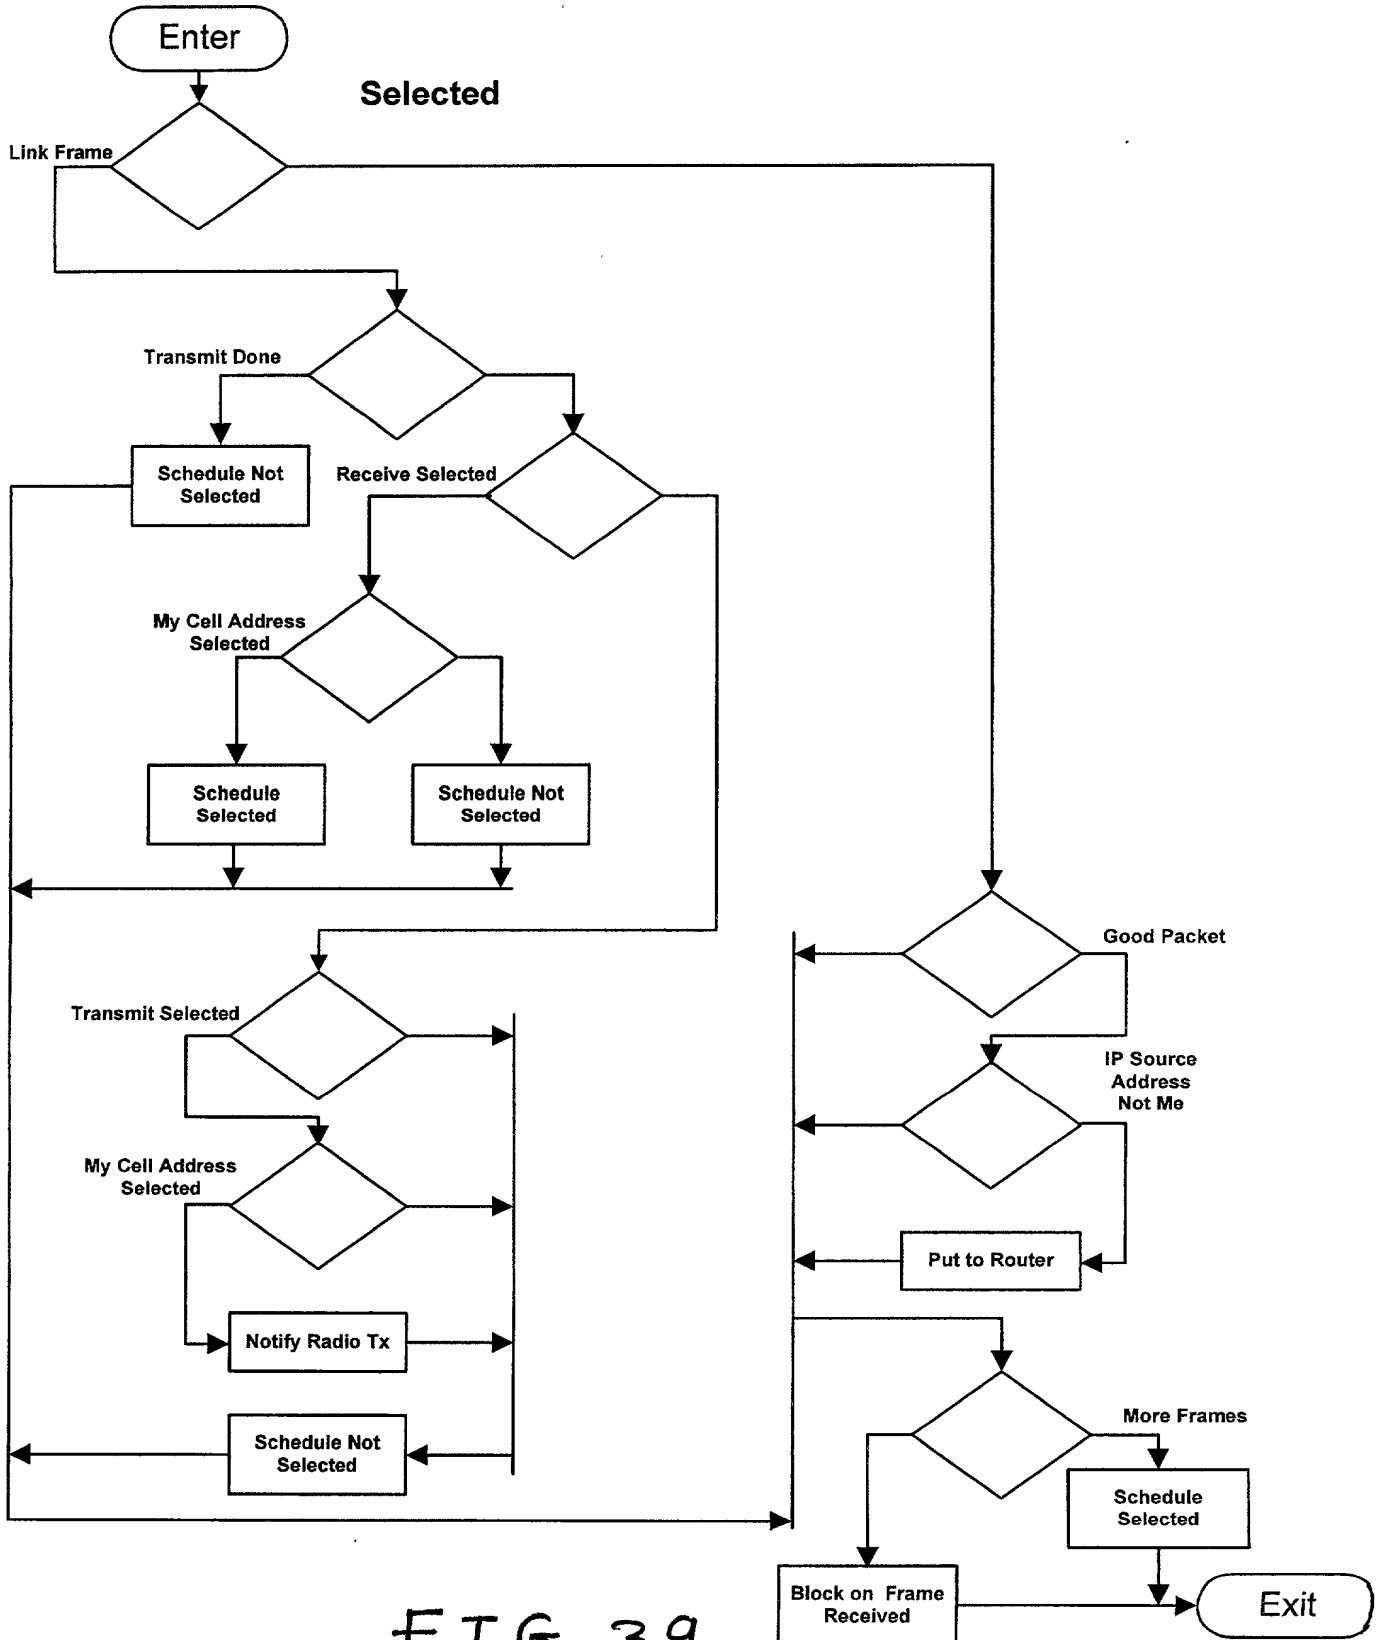


FIG. 39

SLIP PROCESSING

SLIP Link Process

Called from system
Initialization

Create

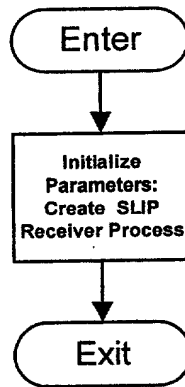


FIG. 40

Called from system
Initialization

Initialization

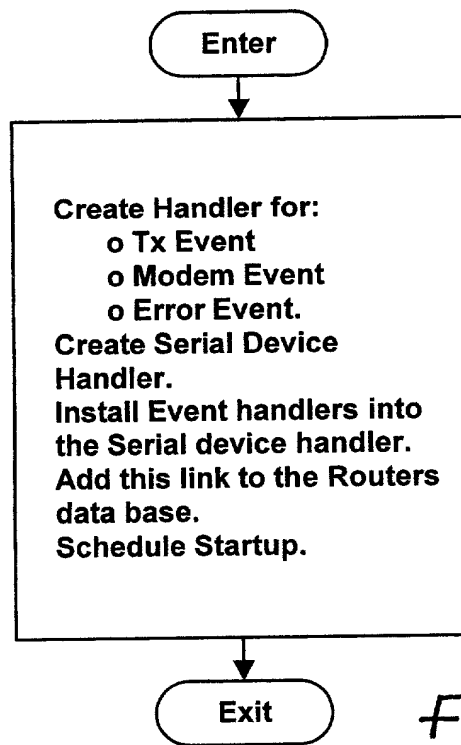


FIG. 41

SLIP Processing

SLIP Link Process

Invoked by Dispatcher

Start Up

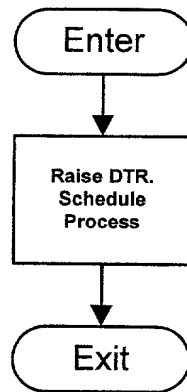


FIG. 42

SLIP Processing

SLIP Link Process

Invoked by Dispatcher

Process

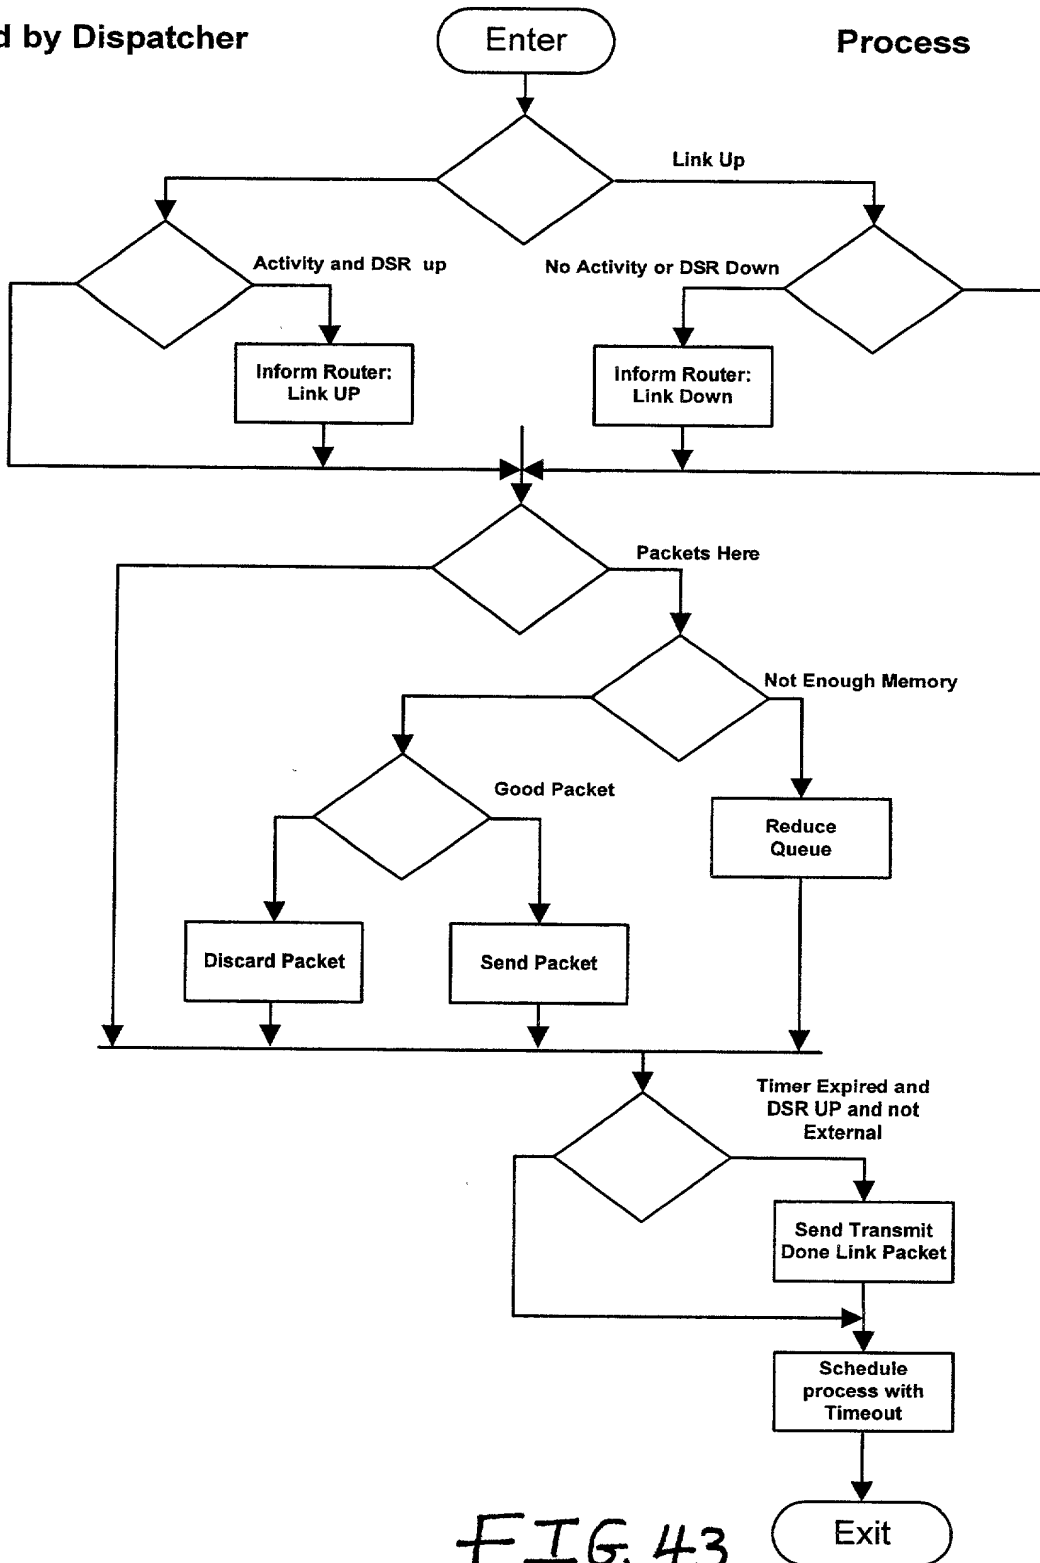


FIG. 43

SLIP Processing

SLIP Receiver Process

Called by SLIP Link Process

Create

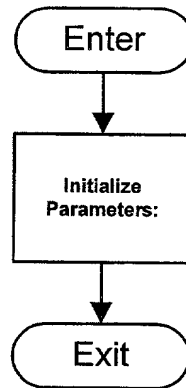


FIG. 44

SLIP Processing

SLIP Receiver Process

Called by SLIP Link Process

Initialization

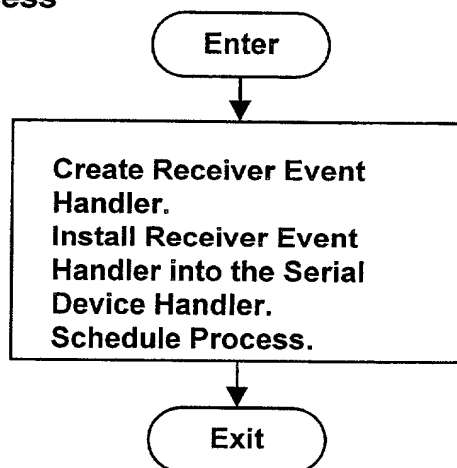


FIG. 45

SLIP Processing

SLIP Receiver Process

Invoked by Dispatcher

Process

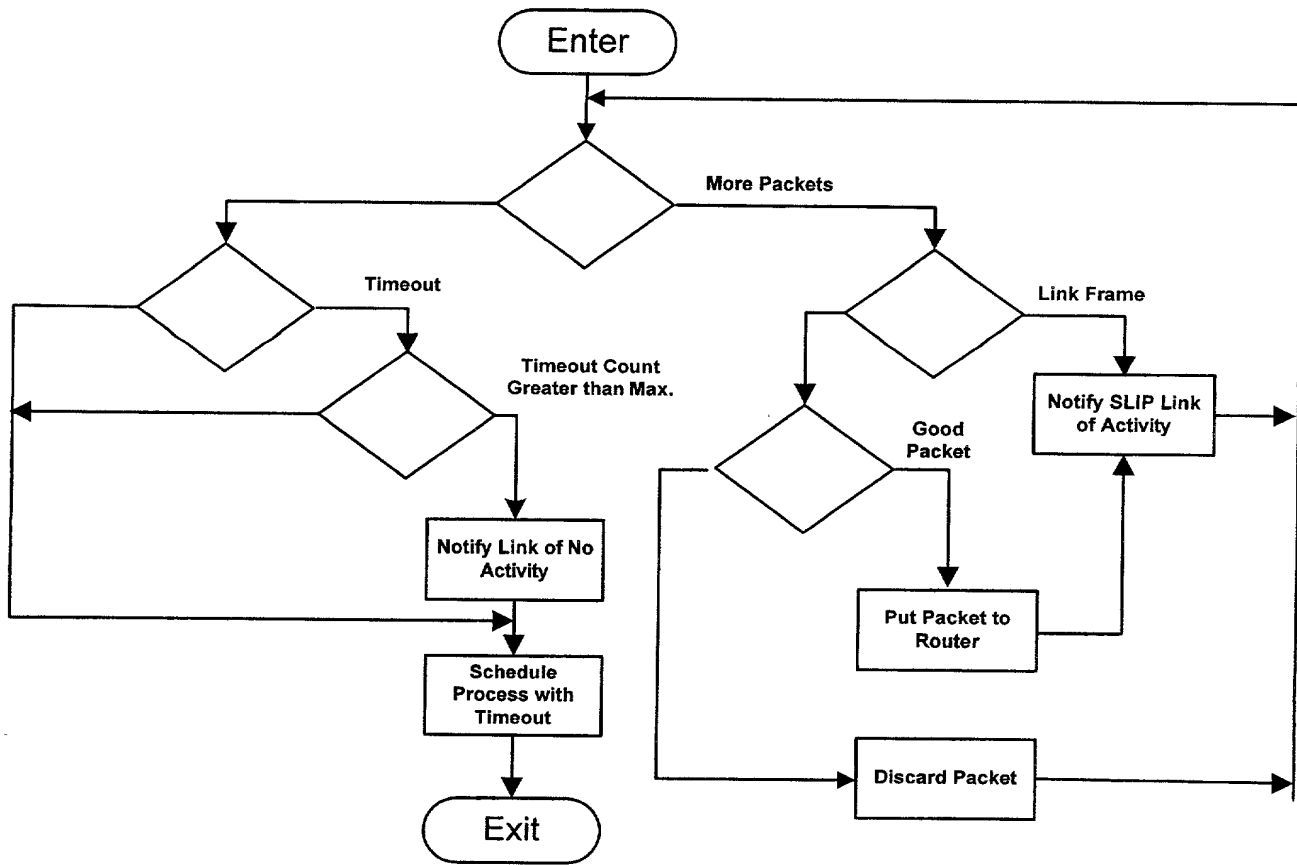


FIG. 46

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	100830-10100
	First Named Inventor	William M. Brown et al
	COMPLETE IF KNOWN	
	Application Number	/ TBA
	Filing Date	
	Group Art Unit	TBA
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
	Examiner Name	TBA

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND APPARATUS FOR WIRELESS NETWORKING

the specification of which

(Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) [] as United States Application Number or PCT International

Application Number [] and was amended on (MM/DD/YYYY) [] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → **+**

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number
Bernard L. Kleinke, Esq.	22,123		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label


OR ☒ Correspondence address below

Name	Bernard L. Kleinke, Esq.				
Address	Higgs, Fletcher & Mack, LLP				
Address	401 West "A" Street, Suite 2600				
City	San Diego	State	CA	ZIP	92101
Country	U.S.A.	Telephone	(619) 236-1551	Fax	(619) 696-1410

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])		Family Name or Surname	
WILLIAM M.		BROWN	
Inventor's Signature			Date
Residence: City	San Marcos	State	CA
Country	U.S.A.	Citizenship	U.S.A.
Post Office Address	2052 Sequoia Street		
Post Office Address			
City	San Marcos	State	CA
ZIP	92069	Country	U.S.A.

☒ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → +

PTO/SB/02A (3-97)

Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 3 of 3

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

ROBERT S.

BELL

**Inventor's
Signature**

X Robert S Bell

Date

6/12/00

Residence: City

Ocean side

State

CA

Country

U.S.A.

Citizenship

U.S.A

Post Office Address

3349 Par Drive

Post Office Address

City

Ocean side

State

CA

ZIP

92056

Country

U.S.A.

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

**Inventor's
Signature**

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

**Inventor's
Signature**

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.